

**CERTIFIED LAND CORNER RECORDATION**

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

LOCATION


N 1/16  
S.15 | S.14  
T.14N., R.65W.  
6th P.M.

1. Corner established by this survey.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

1. Set a 5/8" dia. x 24" long rebar with Surv KAP for corner.
2. Corner falls in graded road.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.  
(May Sketch or Paste Reproduction on Reverse Side.)

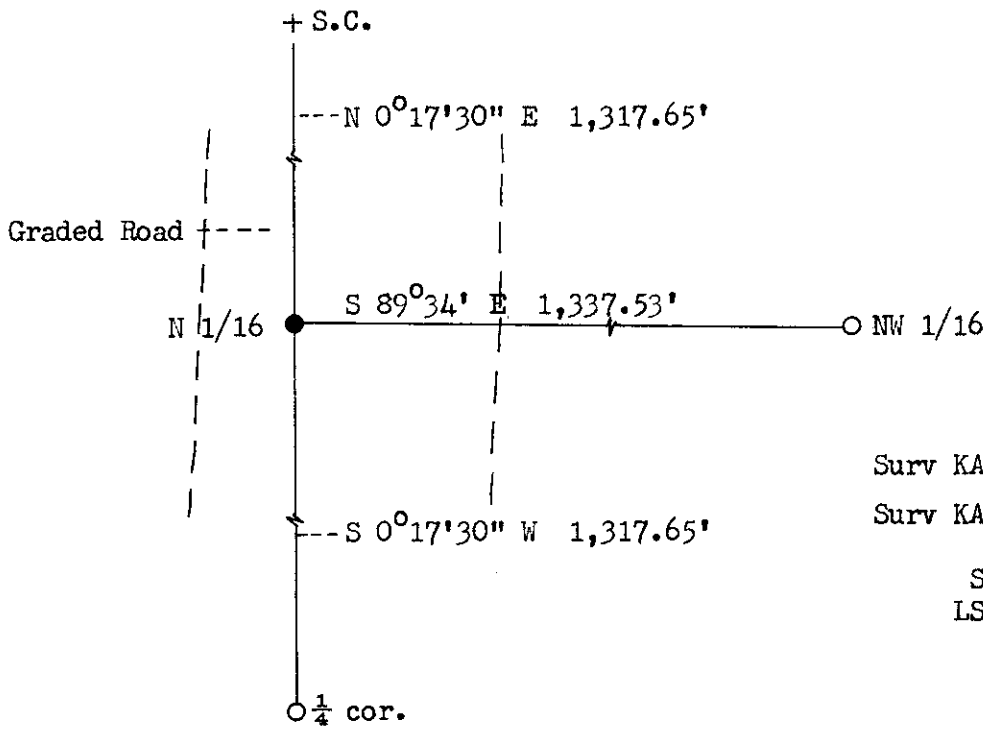

Surv KAP set 6" below surface.  
Surv KAP stamped:  
N 1/16  
S.15 S.14  
LS 519 1972

I, R.L. Hudson certify that I have carefully performed ~~or reviewed~~ the work done on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson Wyoming L.S. No. 519  
Signature of Surveyor Registration No.

STATE OF WYOMING,  
Office of Clerk and Recorder,  
County of Laramie

This "corner record" was filed for record on the 23rd day of May, 19 72, was noted on the cross-index plat and is assigned page No. 14-65, in book No. 107

Johly B. Holloman County Official

Cross Index No. _____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____

The State of Wyoming }  
County of Laramie } SS

This instrument was filed for record  
at 3:07 o'clock P.M. on the  
23rd day of May  
A. D. 1912, and duly recorded in  
Book ..... on page .....



County Clerk & Ex-Officio Register of Deeds  
By ..... Deputy