

CERTIFIED LAND CORNER RECORDATION

LOCATION

$\frac{1}{4}$
S.14 | S.13
T.14N., R.65W.
6th P.M.


DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

1. No corner monument found in place.
2. Found 4" x 8" x 12" granite stone with " $\frac{1}{4}$ " chiseled on face, floating near fence corner.
3. G.L.O. record, "Set Granite Boulder 14 x 7 x 5 for $\frac{1}{4}$ Sec Corner".

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

1. Corner position determined by distance tie by U.P. RR, on line between adjacent section corners.
2. Set standard U.S. 2" galv. iron pipe with brass cap for corner.
3. Left granite stone as memorial.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

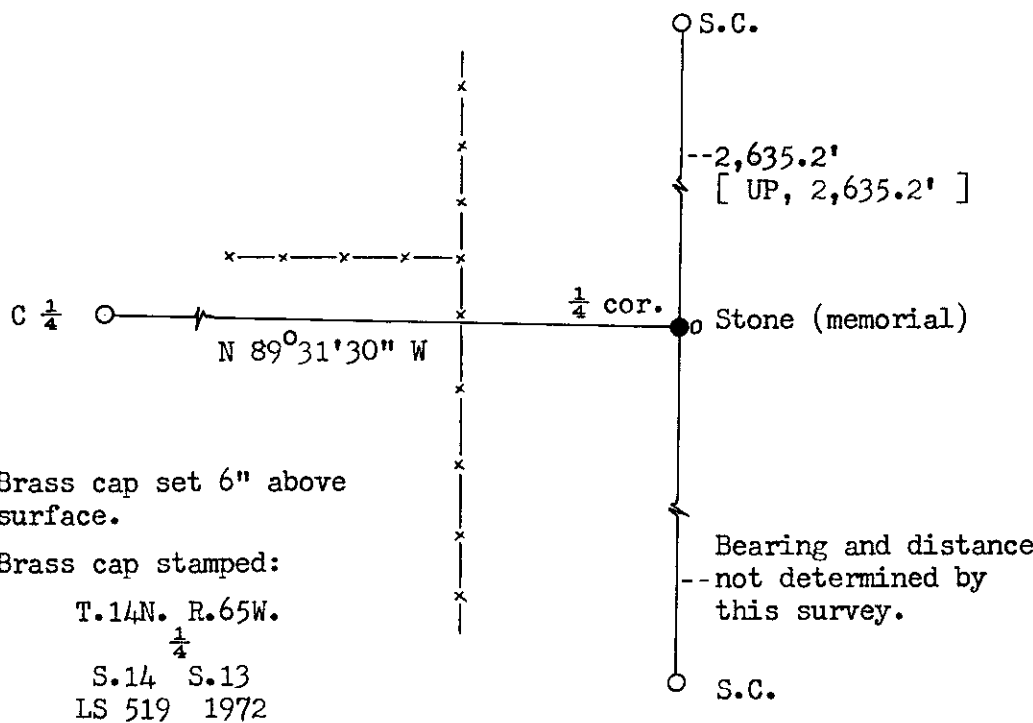

Brass cap set 6" above surface.

Brass cap stamped:
T.14N. R.65W.
 $\frac{1}{4}$
S.14 S.13
LS 519 1972

I, R.L. Hudson certify that I have carefully performed ~~or reviewed~~ the work done on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson
Signature of Surveyor

Wyoming L.S. No. 519
Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of Laramie

This "corner record" was filed for record on the 23rd day of May, 1972, was noted on the cross-index plat and is assigned page No. 14-65, in book No. 10

Jody B. Hillman
County Official

Cross Index No. _____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____

254244

The State of Wyoming }
County of Laramie } SS

This instrument was filed for record
at 5:07 o'clock P. M. on the
23 day of May,
A. D. 1922 and duly recorded in
Book on Page



County Clerk & Ex-Officio Register of Deeds
By _____, Deputy