

State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Notes: Unknown

Subsequent Records: Certified Land Corner Recordation form filed May 23, 1983, by Mr. Edward C. Fry, Wyoming P.E./L.S. No. 662 and Certified Land Corner Recordation form filed April 12, 1984, by Mr. John A. Steil, Wyoming P.L.S. 2500. Wyoming Certified Land Corner Recordation Certificate form filed September 13, 1993, by Mr. Doyle Abrahamson, Wyoming P.L.S. 599.

Found: A No. 5 x 24" rebar with a 2" aluminum cap with only faint marks and remaining two numerals to L.S. 2500 due to vehicular traffic over the monument and monument being set at road surface.

Set: At the established corner point above, I removed the found 2" faintly marked aluminum cap and rebar and set a No. 6 x 30" rebar with a 2" aluminum cap, 0.15' below bituminous roadway surface and marked as noted below.

LARAMIE COUNTY CLERK
CHEYENNE, WY
15247
'96 MAY 21 AM 10:45

183270

Aluminum Cap Markings

A.V.I. P.C.	
T.14N.	R.65W.
S19	S20
S30	S29

1996
PLS 2927


GPS DERIVED TIES FROM THE CORNER OF THIS RECORD:

BASIS OF BEARINGS AND MEASURED BY THE TRIMBLE REAL TIME GPS METHODS BETWEEN CITY OF CHEYENNE CONTROL MONUMENTS "PERSHING" AND "ARCHER": N57°55'13.8"E, 7217.038', SCALE FACTOR 1.000000

<u>Corner Identification</u>	<u>Monumentation</u>	<u>Bearing</u>	<u>Distance</u>
E 1/4 Corner Sec. 30	3 1/4" Aluminum Cap	S00°38'59.6"W	2632.72'
NE Cor Sec. 29	3 1/4" Aluminum Cap	S89°49'29.4"E	5291.15'
W.D.O.T. R/W Marker	Standard R/W Marker	N17°14'54"W	159.77'

Date of Field Work: 13, May, 1996 Office Reference: Job No. 2-1978.96

CROSS INDEX DIAGRAM

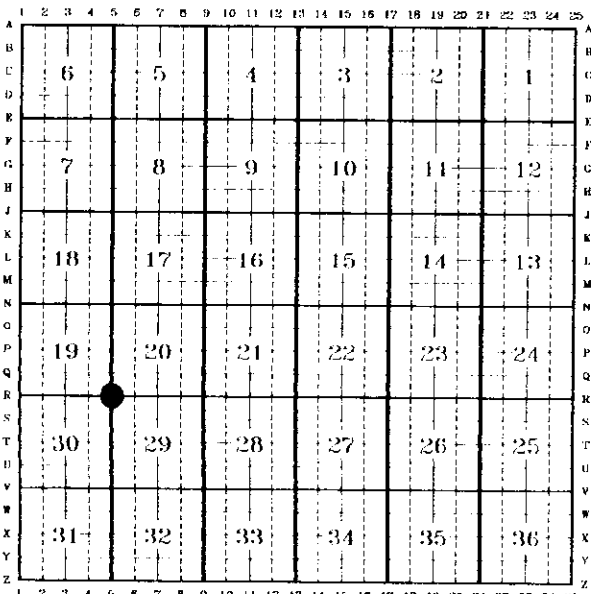

Firm/Agency, Address

Paul A. Reid, A.V.I.p.c.
2035 Westland Road
Cheyenne, WY 82001

Telephone Number:
(307)-637-6017

This corner record was prepared by me or under my direction and supervision.
SEAL & SIGNATURE



Corner Name: NE Corner Section: 30 T 14N R 65W; 6TH P.M. Cross-Index No.: R-5