

State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Notes: Unknown

Subsequent Records: "MESA TRACTS" a subdivision of a portion of Section 30, T.14N., R.65W., 6th P.M., by T.H. Baldwin circa 1946; "MESA TRACTS SECOND FILING" a subdivision of Part of Section 30, T.14N., R.65W., 6th P.M., by T.H. Baldwin circa 1952; Field notes of M.D. Martin survey for Allan Christensen, Book XX, Pages 7-10, circa July, 1960 in field books contained in the offices of the Laramie County Engineer; Certified Land Corner Recordation form filed April 12, 1984, by Mr. John Steil, Wyoming P.L.S. 2500; Wyoming Certified Land Corner Recordation Certificate filed September 13, 1993, by Mr. Doyle Abrahamson, Wyoming P.L.S. 599.

Found: Buried 2.0' below the bituminous base of Reese Road, formerly known as Laramie County Road No. 108, I found a well set and undisturbed 3" Iron Pipe. This pipe matches the MESA TRACTS SECOND FILING tie from the E 1/4 corner of Sec. 30 to the found 2" Iron Pipe at the SE corner of said subdivision. This pipe was accepted as a faithful perpetuation and monumentation of the East 1/4 Corner of Section 30. The monument set in the above mentioned CLCR form filed April 12, 1984 was not found.

Set: In the center of the 3" Iron Pipe, I set a No. 6 x 33" rebar with a appropriately marked 3 1/4" Domed Aluminum Cap, dated 1996 and encased in approximately 1 foot of concrete, 0.1 foot below the bituminous surface and approximate centerline of Reese Road.

Removed: At the request of Mr. John Steil, Wyoming P.L.S. 2500, I removed a 2" aluminum cap with faint markings of L.S. 2500 affixed to a 5/8" x 24" rebar and also being the monument noted in Wyoming CLCR Certificate filed September 13, 1993.


GPS DERIVED TIES FROM THE CORNER OF THIS RECORD:

BASIS OF BEARINGS AND MEASURED BY THE TRIMBLE REAL TIME GPS METHODS BETWEEN CITY OF CHEYENNE CONTROL MONUMENTS "PERSHING" AND "ARCHER": N 57°55'13.8" E, 7217.038', SCALE FACTOR 1.000000

<u>Corner Identification</u>	<u>Monumentation</u>	<u>Bearing</u>	<u>Distance</u>
SE COR MESA TRACTS 2ND FILING	2" IRON PIPE	S75°12'30"W	41.43'
SEC COR 30/29/32/31	MARKED STONE	S00°21'46.1"W	2634.57'
SEC COR 19/20/29/30	3 1/4" AL. CAP	N00°38'59.6"E	2632.72'
1/4 COR MONUMENT PULLED	2" AL. CAP	S52°34'45"E	4.51'

Date of Field Work: 13, May, 1996 Office Reference: Job No. 2-1978.96

CROSS INDEX DIAGRAM

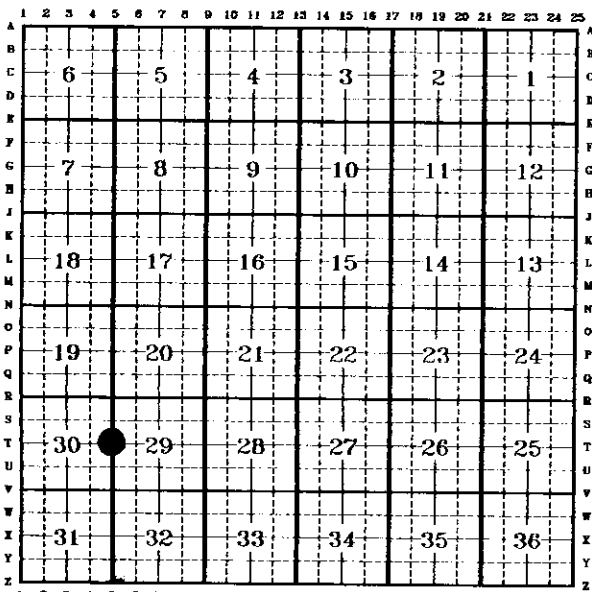

Firm/Agency, Address

Paul A. Reid, A.V.I.p.c.


2035 Westland Road

Cheyenne, WY 82001

Telephone Number:

(307)-637-6017

This corner record was prepared by me or under my direction and supervision.
SEAL & SIGNATURE

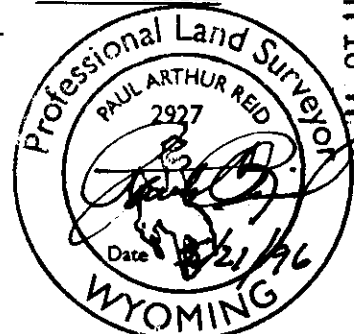

183272

96 MAY 21 AM 10 47

LARAMIE COUNTY CLERK
CHEYENNE, WY.

Corner Name: E 1/4 Corner Section: 30 T 14N R 65W; 6TH P.M. Cross-Index No.: T-5