CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

LOCATION

Found a 3/4" dia. iron pipe as shown on sketch.

S.14 S.13 S.23 S.24

T.14N.,R.66W. 6th P.M.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner:


Set a $1\frac{1}{2}$ " dia. x 30" long iron pipe with brass cap.

Accessories:

The 3/4" dia. iron pipe (found) bears N 89050'05" W, 40.00 feet distant.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.

(May Sketch or Paste Reproduction on Reverse Side.)

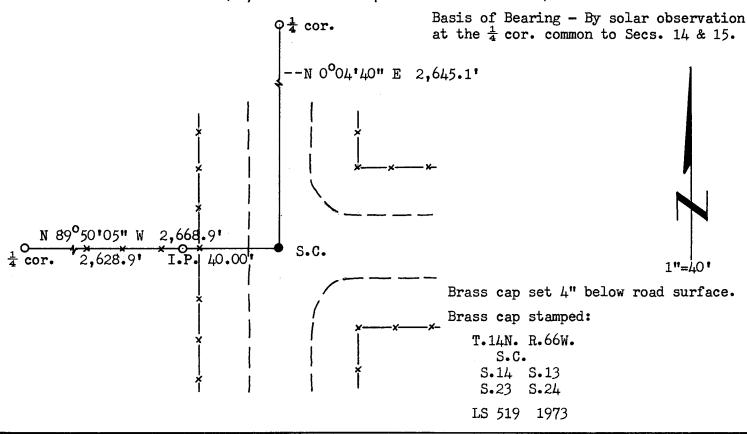

I, R.L. Hudson certify that I have carefully performed er reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Wyoming L.S. No. 519

Signature of Surveyor Registration No.

STATE OF WYOMING,

Office of Clerk and Recorder,

County of Maramul

This "corner record" was filed for record on the 29th day of _______ on the cross-index plat and is assigned page No.14-66, in book No. ONE.

 $\frac{19.73}{2}$, was noted

 County Official

 Cross Index No.
 T.
 R.
 Mer.

 T.
 R.
 Mer.

N-21 14-66

Photographed..... Indexed V The State of Wyoming SS County of Laramie SS

This circument was filed for record

at 29 day of May

A. D. 19 23 and duly recorded in

---- on Page Book

County Clerk & Ex-Officio Register of Deeds