

State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Notes: Unknown

Subsequent Records: Certified Land Corner Recordation form filed November 19, 1973 by Mr. R.L. Hudson, Wyoming L.S. No. 519, indicating found boat spike @ the corner point with a tie by solar observation to a set rebar w/KAP in the approximate centerline of Basin Street bearing N0°21'15"E, 1319.26'.

Found: A standard 3/4" Wyoming Department of Transportation aluminum cap marked "WYOMING HIGHWAY DEPT DO NOT DISTURB SURVEY MARKER", encased in a 2' x 2' concrete pad. Aluminum cap was stamped as noted below with a punch mark. After conversation with Mr. David Hammond, P.L.S., District Land Surveyor for the Wyoming Department of Transportation it was my understanding that the punch mark in the monument indicates the actual corner point. All measurements and ties noted below are to the punch mark.

Aluminum Cap Stampings

21	22
28	27

Survey ties from the corner of this record:

Basis of Bearings and Distances: Both being determined and measured by the Trimble RTK GPS System and City of Cheyenne Control Monuments Dell Range No. 2 to Dell Range No. 3 bearing being held as S89°49'41"W.

Corner Identification	Monumentation	Bearing	Distance
Dell Range No. 2	2" Aluminum Cap	S87°43'52"W	824.72'
1/4 Cor. S21/S28	3/4" Aluminum Cap	N89°52'34"W	2638.27'


Set rebar w/Kap per	5/8" rebar only	N00°04'03"E	1319.22'
CLCR R.L.Hudson 11/19/1973	Geodetic Bearing	N00°19'36"E	1319.22'

SE Corner Lot 4 Block 16	3/4" Iron Pipe	N87°34'20"W	994.53'
Frontier Gardens Third Filing			

Dell Range No. 3	2" Aluminum Cap	S89°08'53"W	2542.58'
------------------	-----------------	-------------	----------

Date of Field Work: 9, May, 1997 Office Reference: Job No. 2-2022.97

CROSS INDEX DIAGRAM

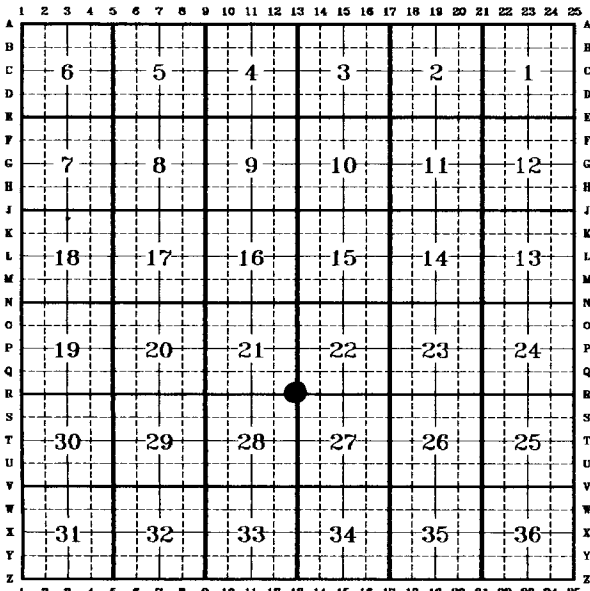

Firm/Agency, Address

Paul A. Reid, A.V.I.p.c.

2035 Westland Road


Cheyenne, WY 82001

Telephone Number:

(307)-637-6017

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

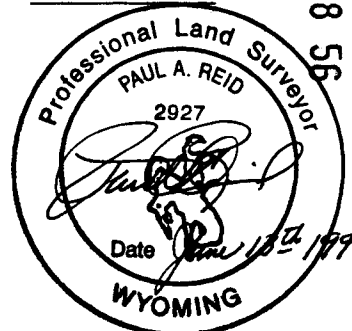

97 JUN 13 AM 8 56

204323

LARAMIE COUNTY CLERK
CHEYENNE, WY.

Corner Name: NW Cor. Section: 27 T 14N R 66W; 6TH P.M. Cross-Index No.: R-13