

State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: Unknown

Subsequent Records: Sunnyside Addition, Second Filing, (circa Nov., 1937); Sunnyside Addition, Fourth Filing, (circa Aug., 1945); McCann Homesites, (circa June, 1952); Cox Subdivision, (circa March, 1955); Atkins Addition, Second Filing, (circa Sept., 1964).

Found: Nothing at the corner point. The reestablishment of this corner was evaluated from 16 recovered monuments of the above mentioned subdivisions. The corner was set from the found original monuments along the south line of the Tracts of the Sunnyside Addition, Second Filing, and the southeast corner of Tract 140 of the Sunnyside Addition, Fourth Filing. Also, the found original monument to the SE corner of Tract 26, Sunnyside Addition, Second Filing was adjacent to a large 6" x 6" wood fence corner post. After analysis, that monument was believed to have moved Southeasterly and was considered disturbed.

Set: At the corner point, I set a No.6 x 30" rebar with 3 1/4" Domed Aluminum Cap, approximately 0.1' below the asphalt roadway and in the approximate centerline of East Pershing Boulevard (Old U.S. Hwy 30). The aluminum cap was marked as noted.

City of Cheyenne Ground Datum coordinates for this point based upon City of Cheyenne control monuments "Sunnyside" and "East" being held fixed, are: N 74701.842 E 614413.653 with a scale factor of 1.000004307.

Aluminum Cap Markings

T.14N. R.66W.

S27|S26

S34|S35

1996

P.L.S. 2927

LARAMIE COUNTY CLERK
CHEYENNE, WY.
180082
'96 MAR 29 AM 10 11

Date of Field Work: 26, March, 1996 Office Reference: Job No. 2-1970.96

CROSS INDEX DIAGRAM

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	
A																									A
B																									B
C	6				5				4					3					2						C
D																									D
E																									E
F																									F
G																									G
H	7				8				9					10					11						H
I																									I
J																									J
K																									K
L	18				17				16					15					14						L
M																									M
N																									N
O																									O
P																									P
Q	19				20				21					22					23						Q
R																									R
S																									S
T																									T
U	30				29				28					27					26						U
V																									V
W																									W
X																									X
Y	31				32				33					34					35						Y
Z																									Z
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	

Firm/Agency, Address

Paul A. Reid, A.V.I.p.c.

2035 Westland Road


Cheyenne, WY 82001

Telephone Number:

(307)-637-6017

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

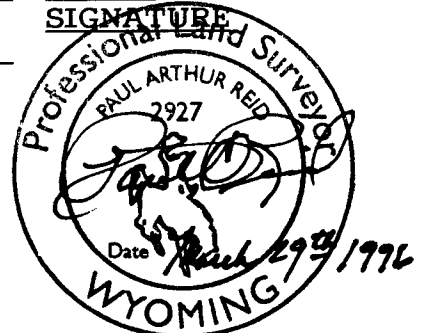

Corner Name: NE Corner Section: 34 T 14N R 66W; 6TH P.M. Cross-Index No.: V-17