

CERTIFIED LAND CORNER RECORDATION


LOCATION DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)
 No evidence of corner monument found.
 ¼ S.36 Corner position re-established by proportionate measurement.
 S. 1 G.L.O. record - Not known.
 T.14N.,R.65W.
 T.13N.,R.65W.
 6th P.M.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner: Set a 5/8" dia. x 24" long rebar with 2" dia. aluminum cap.
 Accessories: A 5/8" dia. x 24" long rebar with 1½" dia. aluminum cap bears S 30° 46' E, 28.87 feet distant. (Stamped R.P. NO. 1)
 A 5/8" dia. x 24" long rebar with 1½" dia. aluminum cap bears S 40° 52' 30" W, 32.43 feet distant. (Stamped R.P. NO. 2)

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
 (May Sketch or Paste Reproduction on Reverse Side.)

Basis of Bearing - By solar observation, 1½ miles east of this corner.
 Distances based on measurements by electronic means.

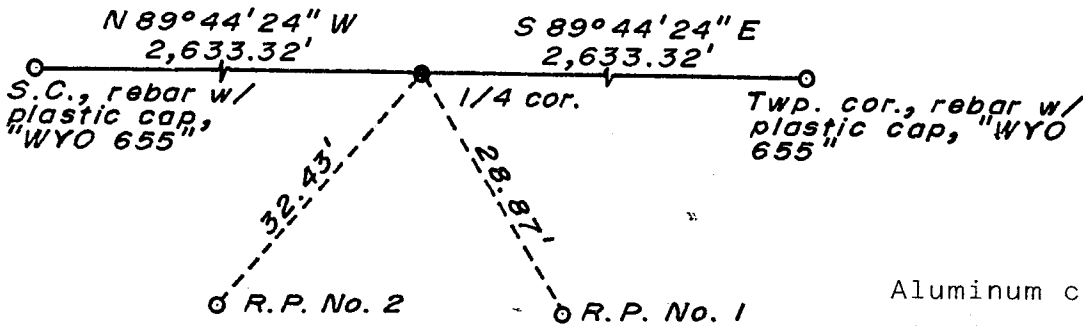

Aluminum cap set flush.
 Aluminum cap stamped:

T.14N. R.65W.
 ¼ S.36
 S. 1
 T.13N.
 LS 519 1979



R. L. Hudson certify that I have carefully performed ~~or reviewed~~ the work done on the diagrammed corner as reported on this recordation form and approve the same.

R. L. Hudson Wyoming L.S. No. 519
 Signature of Surveyor Registration No.

STATE OF WYOMING,
 Office of Clerk and Recorder,
 County of Thermite

534722

This "corner record" was filed for record on the 6 day of July, 1979, was noted on the cross-index plat and is assigned page No. _____, in book No. _____.

Janet E. Whitehead
 County Official

Cross Index No.	T. _____	R. _____	Mer.
<u>A-23</u>	T. <u>13</u>	R. <u>65</u>	Mer.
<u>2-23</u>	T. <u>14</u>	R. <u>65</u>	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.