


# Wyoming Certified Land Corner Recordation Certificate

This form is to be completed in accordance with W.S. 36-11-101, printed in black ink or typed, and shall be for one individual corner.

Describe below, or show in sketch attached to this form, the corner evidence found. Include condition and type of monument, accessories and ties. Describe any maintenance or rehabilitation performed. In the circle to the right, show monument inscription. If monument is determined lost or obliterated, restate the GLO or BLM original field note record; describe or show the procedure used to reestablish the corner and all data as above for a found monument.

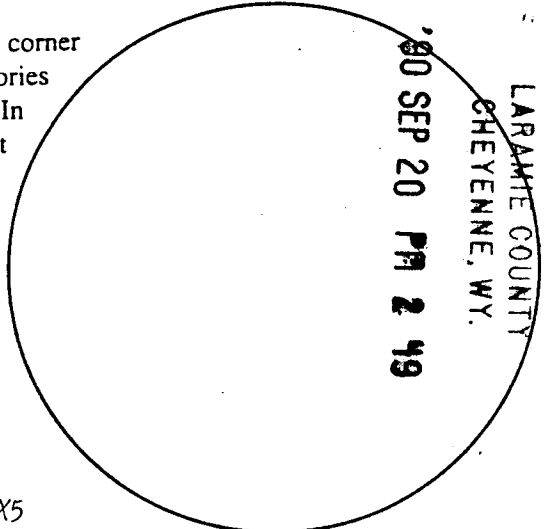

Field Date 3/22/89 Office Reference S02-314E0988

**ORIGINAL:** From the corner of Township 13 & 14 North in Range 66 & 67 West, I run North along the East boundary of Section 36, T14N, R67W 80.00 chains: Set a granite boulder, 18X12X5 for corner to Sections 25 & 36 in Township 14 North, Range 67 West.

**Monument Inscription**

**FOUND:** 1½" brass cap, set in concrete in fence corner at Southeast corner of Bent Street and Pershing Blvd. Monument inscription was not very clear due to corrosion of monument. The latitudinal position of the North line of Section 36 closely matched the properties located in the Subdivisions adjacent to the South boundary of Pershing and is historically evidenced on the plats of "Park Addition to Cheyenne", "Holdrege Addition to Cheyenne", and Amended plat of "Holdrege's Addition to Cheyenne", where the North boundary of Section 36 and the Northeast Corner of Section 36 are clearly and specifically referenced, defined, and denoted. The longitudinal position of this corner is also referenced on the above mentioned Subdivision plats and its reestablished position very well matches the distances and ties shown thereon.

## State of Wyoming

Office of County Clerk

County of \_\_\_\_\_

This Certified Land Corner Recordation Certificate was filed for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19 \_\_\_\_, in Book No. T 14, R 67, on Alpha-Numeric coordinates V25 and was noted on the Cross Index Plat.

*Janet C. Whitehead*  
\_\_\_\_\_  
County Clerk

Corner Type:

Aliquot Corner

Other

Section(s) 36

Meridian 6th Principal

Corner Name NE Corner Fract.  
Sec, 36

Township 14

Range 67 Page \_\_\_\_\_

Sheet 1 of 2

**BOOK 1292**

**935**

**Directions for using the  
Cross Index Plat**

Section, quarter and sixteenth corners will be marked with a dot at the corner location. The alpha-numeric coordinate number is then determined for the intersection of the two lines. A corner that applies to two or more townships shall be filed under all that apply by the use of photo copies.

Closing corners will be indexed under the township in which they control ownership. For 1/64, 1/256, 1/1024 and non-aliquot corners lying between grid designations, mark the appropriate grid area with a dot and use the index code to the north and west (local systems may be used if the method is approved by the County Surveyor or Clerk and a written description of its use is filed in the front of each book of certificates).

**Cross Index Plat**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	
A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	A
B	-	6	-	-	-	5	-	-	-	4	-	-	-	3	-	-	-	2	-	-	-	-	-	-	B
C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	C
D	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	D
E	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	E
F	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	F
G	-	7	-	-	-	8	-	-	-	9	-	-	-	10	-	-	-	11	-	-	-	-	-	-	G
H	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	H
J	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	J
K	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	K
L	-	18	-	-	-	17	-	-	-	16	-	-	-	15	-	-	-	14	-	-	-	-	-	-	L
M	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	M
N	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	N
O	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	O
P	-	19	-	-	-	20	-	-	-	21	-	-	-	22	-	-	-	23	-	-	-	-	-	-	P
Q	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Q
R	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	R
S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	S
T	-	30	-	-	-	29	-	-	-	28	-	-	-	27	-	-	-	26	-	-	-	-	-	-	T
U	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	U
V	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	V
W	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	W
X	-	31	-	-	-	32	-	-	-	33	-	-	-	34	-	-	-	35	-	-	-	-	-	-	X
Y	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Y
Z	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Z
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	

**State Plane Coordinates (optional)**

Zone                    W      WC      EC      E                    feet/meters

NAD 1927                     NGVD 1929                     NAD 1983                     NAVD 1988

North (Y) = 174,847.17                    East (X) = 593,440.01                    EL = \_\_\_\_\_

Latitude \_\_\_\_\_                    Longitude \_\_\_\_\_

Scale Factor \_\_\_\_\_                    Geoid Height \_\_\_\_\_

*Coordinates shown hereon are state plane-surface coordinates based on Wyoming Highway Department control.*

**Certification**

I, Robert W. Taylor, Wyoming PLS-# 3891 certify that I, or others under my supervision, have performed the work as described above and completed this form.

Company or Agency Eastern Wyoming Engineering & Surveying Professionals  
Mailing Address P.O. Box 99  
Street Address 2510 West C  
City, State, ZIP Torrington, WY 82240  
Telephone, FAX 532-3811 FAX 532-4868



Signature, Seal, and Date

Sheet 1 of 2

Sketch to Accompany Corner Recordation for  
NE COR. FRACT, Section 36, T14 N, R67 W

