

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)


LOCATION
 S.30 S.29
 S.31 S.32
 T.14N., R.68W.
 6th P.M.

Found granite stone, 6" x 10" x 16" with grooves. Out of the ground.
 Fence corner post accepted as the corner position.
 G.L.O. record - Granite Boulder, 16 x 10 x 6, Henry G. Hay, 1870.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

None

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
 (May Sketch or Paste Reproduction on Reverse Side.)

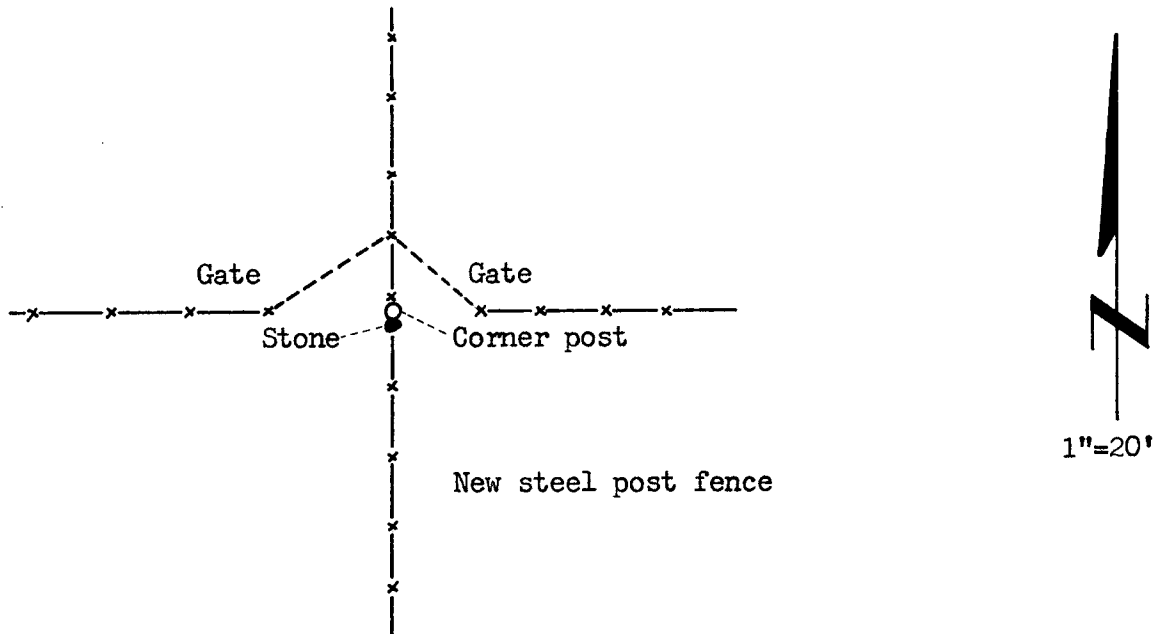

R.L. Hudson

certify that I have carefully performed ~~or reviewed~~ the work on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson
 Signature of Surveyor

Wyoming L.S. No. 519
 Registration No.

STATE OF WYOMING,

Office of Clerk and Recorder,

County of Laramie

This "corner record" was filed for record on the 13th day of September, 1972, was noted on the cross-index plat and is assigned page No. 14-68, in book No. ONE.

Joly B. Hillman
 County Official

Cross Index No. _____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____

Photographed _____

Indexed X

Posted X

The State of Wyoming }
County of Laramie } SS

This instrument was filed for record
at 1:58 o'clock P. M. on the
16th day of September
A. D. 1922 and duly recorded in
Book _____ on page _____

John B. Williams

County Clerk & Ex-Officio Register of Deeds
By _____ Deputy