State of Wyoming Corner Record

(in compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36—11—101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)


Reverse side of this form may be used if more space is needed


Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. RELORO: THE ORIGINAL '14 SELTION CORNER OF SELTIONS 7 MNA 12 WAS A GRANTE STONE, 16 XIOX 7, MARKED 14 ON WEST FACE.

SET AN IRON POST 3' FEET LONG, I" DIMMETER, 27" IN THE GROUND, WITH ORIGINAL STONE DEPOSITED MONESIAS BRASS CAP MARKED AS SHOWN BELOW RAISED A MOUND OF STONE Z' BASE 1/2 HIGH, WEST OF CORNER.

FOUND 21/2" Berss CAN ON PIAE, 6" EXPOSED.

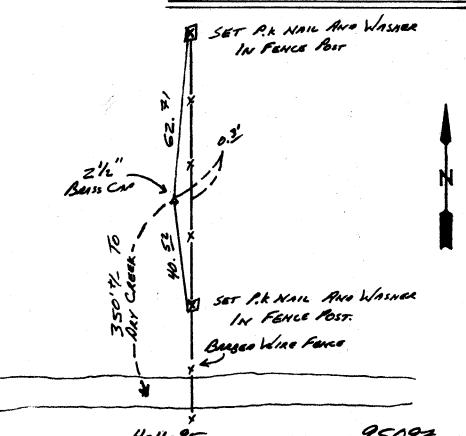



4-11-95 Date of Field Work:_

CROSS INDEX DIAGRAM

Office Reference:_

Firm/Agency, Address STEIL SURVEYING SERVICES

1102 WEST 19th STREET

82001

This corner record was prepared by me or under my direction and supervision. SEAL & SIGNATURE

Telephone Number: <u>(307)</u> 634-7273



NOST 1/4 Car.

Section: 7 T/4W RELLY: 67N P.M. Cross-Index No.: 6-2

0501