State of Wyoming Corner Record

(in compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997, Section 33-29-140, et. seq. and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

FOUND: Found original G.L.O. stone well set upright in good condition with 1/4 chiseled. Set stake & lathe and referenced as shown.

G.L.O. RECORD: Granite Stone 16" x 10" x 8"
Measured 10" x 9" x 6" (Above Ground)

SET: Stake & Lathe along side.

REFERENCES: Found as shown

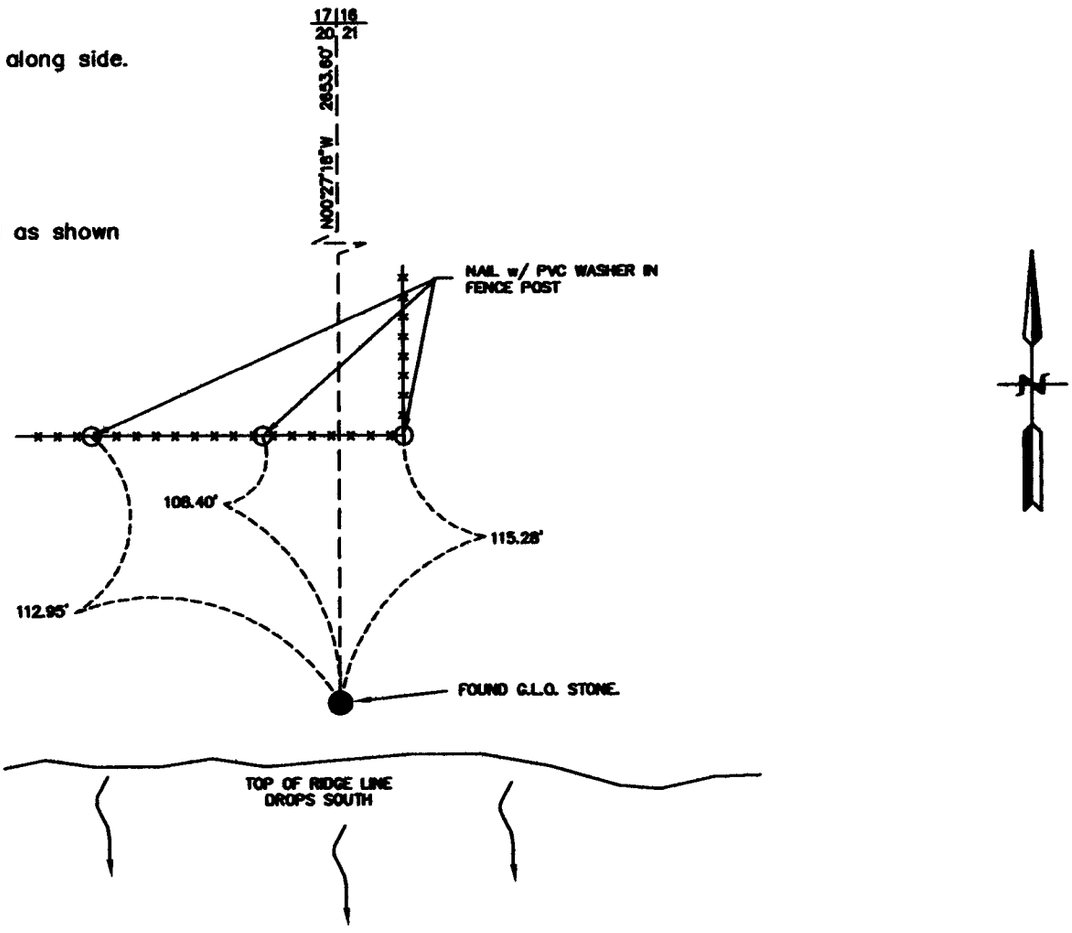

Date of Field Work: 12-03 Office Reference: 2-2389.03

CROSS INDEX DIAGRAM

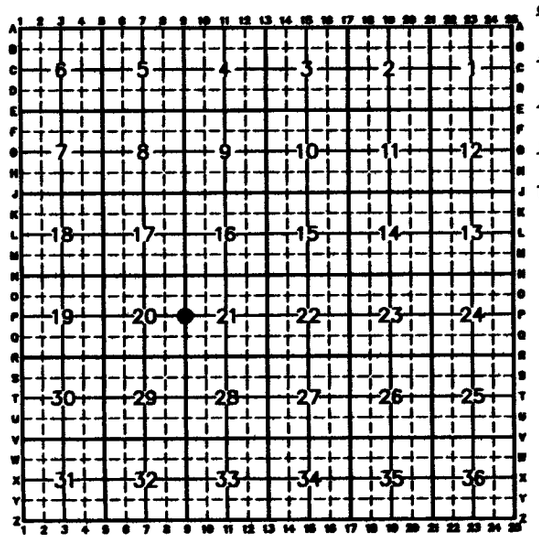

Firm/Agency, Address

James D. Voeller
A.V.I., p.c.
2035 Westland Road
Cheyenne, WY 82001
Telephone Number: (307) 637-6017

This corner record was prepared by me or under my direction and supervision.
SEAL & SIGNATURE

Corner Name: 1/4 CORNER Section: 20|21 T14N R69W; 6th P.M. Cross-Index No.: P-9

SBRPEPLS/PLSW: March 1994

RECORDED 12/08/2004 AT 2:03 PM REC# 404444 BK# 1852 PG# 1655
DEBRA K. LATHROP, CLERK OF LARAMIE COUNTY, WY PAGE 1 OF 1