

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)



LOCATION S.25 S.30 S.36 S.31 T.14N. R.69W., R.68W. 6th P.M.	Found granite stone, 6" x 10" with 1 groove on south and 5 grooves on north. Stone planted and in good condition. G.L.O. record - Granite Boulder, 17 x 11 x 8, 1870.
--	---

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set a fence post, 3 feet NE'ly as accessory.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

Corner is situated on small ridge, near top of bluffs.

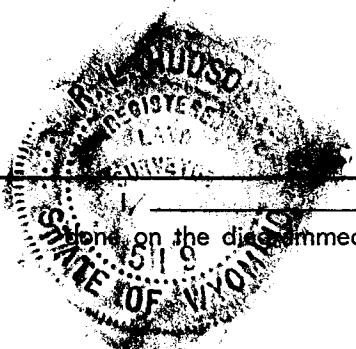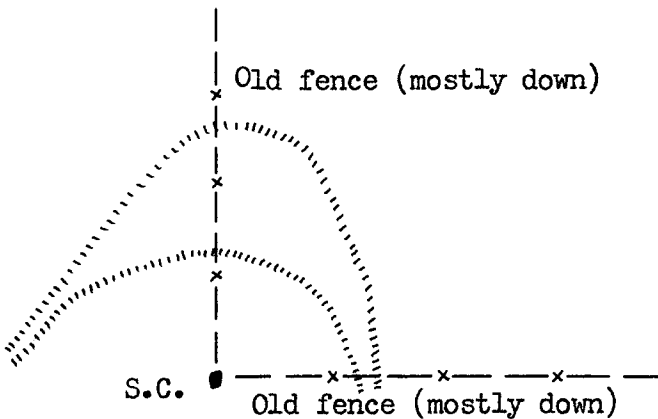

R.L. Hudson

certify that I have carefully performed or reviewed the work done on the designated corner as reported on this recordation form and approve the same.

R.L. Hudson
Signature of Surveyor

Wyoming L.S. No. 519
Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of Terrance

This "corner record" was filed for record on the 13th day of September, 1972, was noted on the cross-index plat and is assigned page No. 14-69, in book No. ONE

Jolly B. Williams
County Official

Cross Index No. <u>14</u>	T. <u>68</u>	R. <u>6</u>	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.

Photographed.....

Indexed...X.....

Posted...X.....

The State of Wyoming }
County of Faramite } ss

This instrument was filed for record
at 1:58 o'clock P. M. on the
6th day of September
A. D. 19 24 and duly recorded in
Book on page

John B. Williams

County Clerk & Ex-Officio Register of Deeds
By....., Deputy