


**CERTIFIED LAND CORNER RECORDATION**

T.14N., R70W.




DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

Found GLO Brass Cap as described in the 1934 Dependent Resurvey.  
 Location easily found by reference to USGS 7½' Quad Map Hecla, Wyo.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

NONE

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.  
 (May Sketch or Paste Reproduction on Reverse Side.)

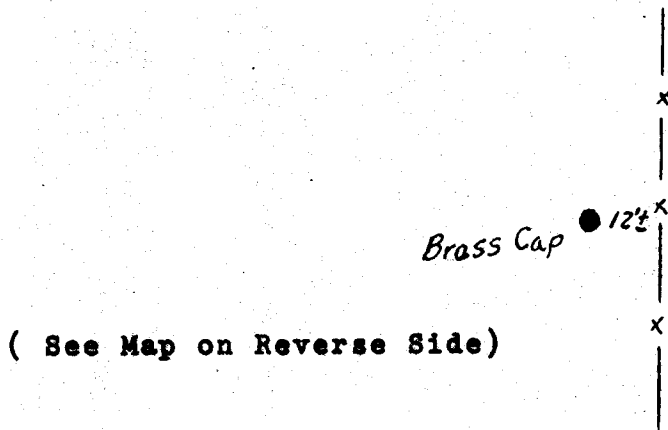

January, 1983

I, Edward C. Fry certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Edward C. Fry PE/LS 662  
 Signature of Surveyor Registration No.

STATE OF WYOMING,  
 Office of Clerk and Recorder,  
 County of Sarasota

This "corner record" was filed for record on the \_\_\_\_\_ day of JAN 24 1983, 19\_\_\_\_, was noted on the cross-index plat and is assigned page No. \_\_\_\_\_, in book No. \_\_\_\_\_.

Photographed \_\_\_\_\_  
 Indexed \_\_\_\_\_  
 Posted \_\_\_\_\_  
 Assessor \_\_\_\_\_

Janet C. Whitehead  
 County Official

Cross Index No. _____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____

**684861**

MAP OF SURVEY

W<sup>1</sup>/<sub>2</sub> Section 34, T. 14 N., R. 70 W.

6th P.M. Laramie County, Wyo.

N.W. Corner

N. 1/4 Corner

S. 89° 29' 04" E.

1309.21'

1309.21'

(N. 1° 35' 00" E. GLO - Basis of Bearings)

1314.95'

NW 1/4 NW 1/4  
39.65 Acres

NE 1/4 NW 1/4  
39.37 Acres

S. 0° 46' 41" W.

1305.33'

1295.97'

S. 89° 53' 26" E.

1327.76'

S. 89° 53' 26" E.

1327.76'

S. 0° 02' 21" E.

SW 1/4 NW 1/4  
40.20 Acres

SE 1/4 NW 1/4  
39.92 Acres

S. 0° 46' 41" W.

1305.33'

1295.97'

Scale: 1" = 500'



W. 1/4 Corner

N. 89° 42' 54" E.

1346.39'

N. 89° 42' 54" E.

1346.39'

N. 89° 42' 54" E.

2651.82'

E. 1/4 Corner

N. 1° 28' 53" W.

1295.11'

NW 1/4 SW 1/4  
39.81 Acres

NE 1/4 SW 1/4  
39.89 Acres

S. 0° 45' 33" E.

1297.21'

1299.51'

N. 89° 48' 56" E.

1330.08'

N. 89° 48' 56" E.

1330.08'

S. 0° 02' 21" E.

N. 1° 28' 53" W.

1295.11'

SW 1/4 SW 1/4  
39.33 Acres

SE 1/4 SW 1/4  
39.40 Acres

S. 0° 45' 33" E.

1297.21'

1299.51'

S.W. Corner

1313.78'

1313.78'

S. 89° 55' 07" W.

S. 1/4 Corner

LEGEND

- ▲ GLO Brass Cap
- 1 1/2" Iron Pipe with Aluminum I.D. Cap
- 5/8" Rebar with Aluminum I.D. Cap

By reference to survey made January 1983 by Edward C. Fry.

*Edward C. Fry*

Reg. P.E. # 662