State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost

or obliterated corner.

No EVIDENCE FOUND
SET 4 24 REBAR


WITH 32 ALLMINUM CAP

GLO RECORD : SANDSTONE (22410 x 34)

NOTE: SEE RECORDS OF SURVEY SEC 5, T. 15N, R 60 W


FOR CONTROL USED AND ADDITIONAL INFORMATION

LARAMIE COUNTY CLERK CHEYENNE, WY. 95 JUN 16 PM 3 15 163806

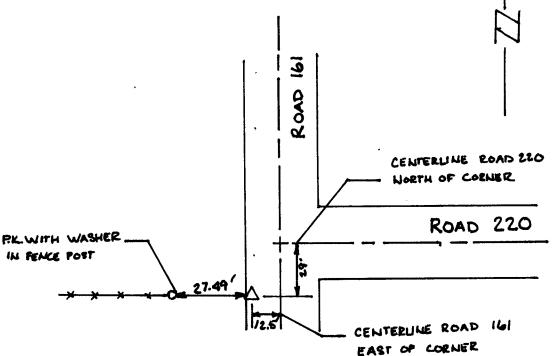

Date of Field Work: APRIL 7, 1995 Office Reference: 2747

CROSS INDEX DIAGRAM



Firm/Agency, Address

INTERMOUNTAIN PROFESSIONAL SERVICES, INC. 5801 OSAGE AVENUE CHEYENNE WY 82001

Telephone Number: (307) 632-3138

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

T. 15 N

R. 60 W

PLS 566



Corner Name: SEC COR 6 Section: TISN R60W; 6 P.M. Cross-Index No.: E-5

BOOK 1400