

**CERTIFIED LAND CORNER RECORDATION**

LOCATION DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

Found stone loose at fence corner. stone 5" x 10" x 15".  
Fences old and look good for line to west, south & north.

18 | 17  
19 | 20  
T 15 N, R 60 W  
6th P.M.


G.L.O. record - not known

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED  
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set # 5 rebar with surv-cap at the corner. Set stone alongside as memorial.

Set 1/2" pipe to north and west in fence lines for witness corners, ( see sketch ) .

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.  
(May Sketch or Paste Reproduction on Reverse Side.)

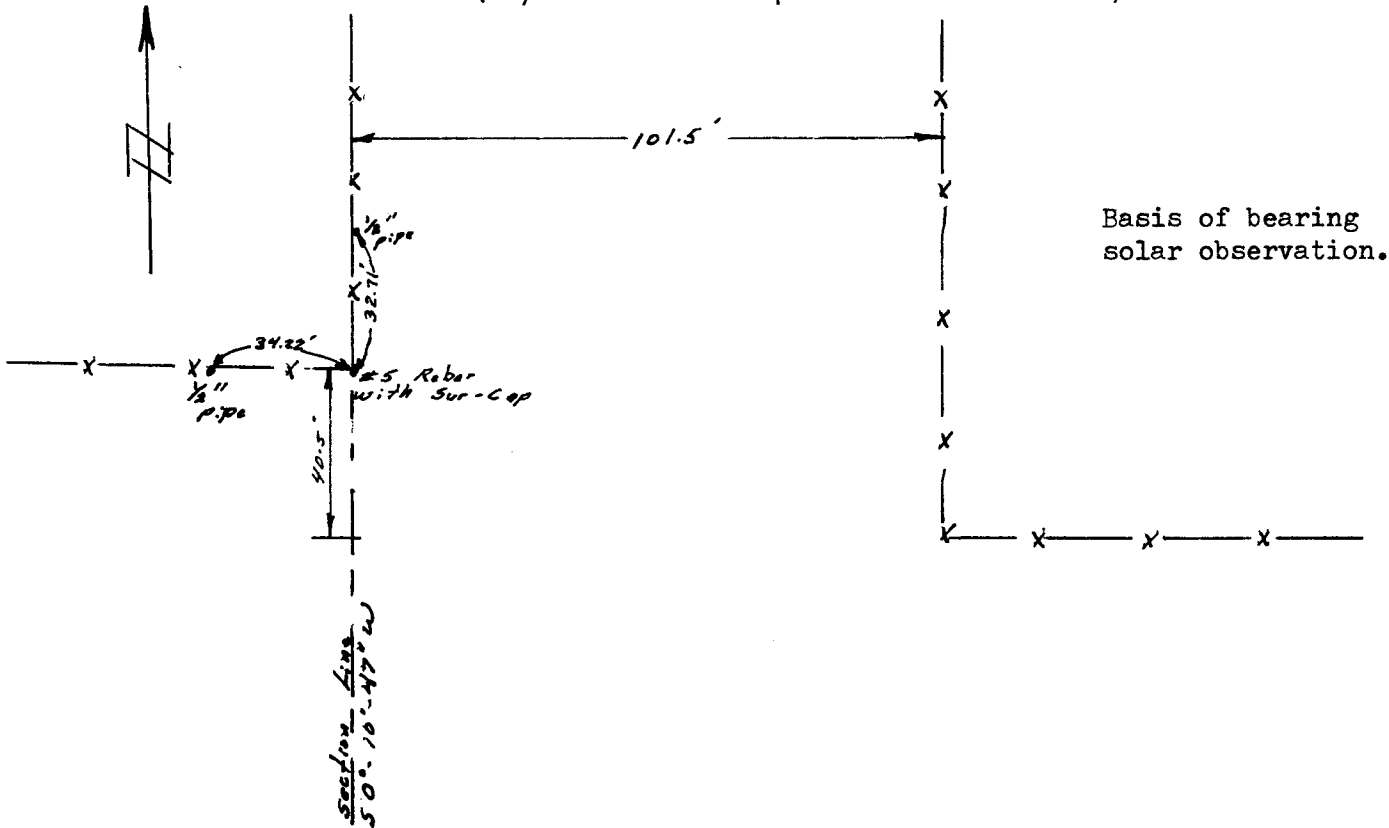

I, Robert C. Corbet certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

*Robert C. Corbet*  
Signature of Surveyor

LS 495  
Registration No.

STATE OF WYOMING,  
Office of Clerk and Recorder,  
County of Sarasie

This "corner record" was filed for record on the 6 day of January, 1975, was noted on the cross-index plat and is assigned page No. \_\_\_\_\_, in book No. \_\_\_\_\_.

*James C. Whitehead*  
County Official

Cross Index No. <u>N-5</u>	T. <u>18</u>	R. <u>60</u>	<u>6</u> Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.

Photographed   
Indexed FB  
Posted   
Assessor

at 12 o'clock P M. on the  
A. D. 19 75 day of January  
Book ..... on page .....

*James C. Mitchell*

County Clerk & Ex-Officio Register of Deeds  
by FB Deputy