FORM E-63

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

R 60 W

30	29
31	32

T 15 N

All evidence of original stone obliterated by farming and road construction. Informed by landowner that a road stone that had been at fence end in SE quad. of intersection was recently destroyed. Set corner based on county road fences and measurement to 1/4 corner Sections 19-20

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set 1½" iron pipe with alum cap 9" below road surface.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

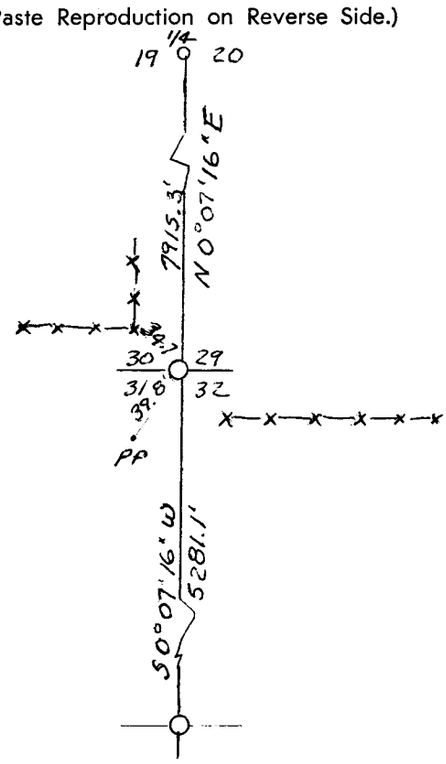

I, Francis J. Thornton certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Francis J Thornton
Signature of Surveyor

Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of _____

665662

This "corner record" was filed for record on the _____ day of JUL 29 1982, 19____, was noted on the cross-index plat and is assigned page No. _____, in book No. _____.

Yount C Whitehead
County Official

Cross Index No. _____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.

V-5 15-60