CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)


T.15 N. 36 31 T.14 N. 1 6

Found 3/4" iron pipe, 0.8' deep in intersection of County Roads 48-46, 15-HI

R.63 W. R.62 W.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set 5/8" rebars with Surv-kaps in fence lines, southeasterly and southwesterly. (See sketch) Stamped 'WITNESS CORNER'

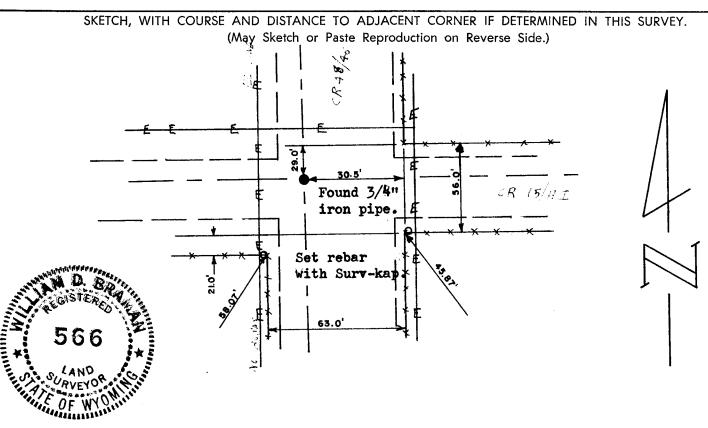

	Minimum.		
	I, William D. Braman	_certify that I have carefully performed or reviewed the wo	rk
	done on the diagrammed corner as reported on this recor	rdation form and approve the same. William D. Brand - US Signature of Surveyor Registration N	2 56 No.
-	STATE OF WYOMING,		
	Office of Clerk and Recorder,		
	County of Jacanie		
	This "corner record" was filed for record on the, day on the cross-index plat and is assigned page No,	in book No	ed
	v.	Janet C Witcheal	_
		Cross Index No. <u>A 25</u> T. <u>/4</u> R. <u>63</u> Me <u>7 2 25</u> T. <u>/5</u> R. <u>63</u> Me T R Me A-/ T. <u>/5-</u> R. <u>6.2</u> Me T R Me T R Me T R Me T R Me	er. er. er. er.
		7.	