State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.


Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

OTZIGINAL CALL.

SANDSTONE ZO" × L"


MADE A THOROUGH SEARCH OF THE IMMEDIATE AREA OF THE EXISTING FENCE LINE INTERSECTIONS. FOUND NO TRACE OF THE CALLED FOR SANDSTONE, CONSIDER THIS CORNER TO BE OBLITERATED. CONSIDER THE FENCE UNE PUNNING SOUTH AND WEST TO BE THE BEST EVIDENCE FOR THE OBIGINAL POSITION OF THE COENEIL COMMON TO

SET Z1/2 " ALUM, CAP ON 30" LONG "6 DEBAR AT FENCE LINE INTERSECTION. POSITION IS IN AGREEMENT WITH RECORD USGLO INFORMATION.

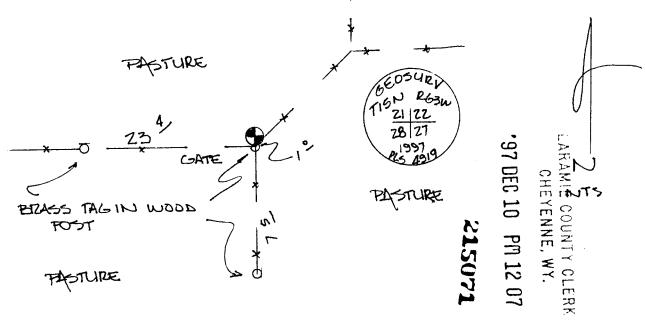

Date of Field Work: 11.05.31

Office Reference:



Firm/Agency, Address DHU IS GUYTON

GEOSURY INC

520 STACY CT STEB LAFAYETTE CO 80026

Telephone Number: <u>505 666 037</u> 9

This corner record was prepared by me or under my

direction and supervision. SEAL & SIGNATURE

Section: 22 T 15N R63W; 6 P.M. Cross-Index No.: R. 12 Corner Name: SW SECTION COR SBRPEPLS/PLSW:March 1994

BUUK