State of Wyoming Corner Record


(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997 Section 33-29-140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

<u>U.S.G.L.O. 1870 Record: Set a limestone 20x12x4 for the corner of Sections 5, 6, 31 & 32.</u>

Found 2" Alumium cap 0.1' below asphalt road surface per corner record dated October 10, 1990 and inscribed as shown below.

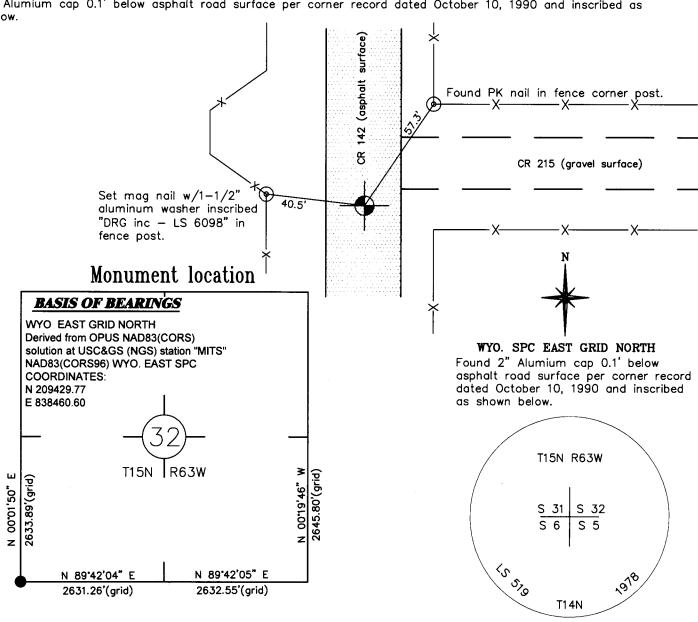

Date of Field Work: 3/12/11 Office Reference: 18665

Cross Index Plat

Firm/Agency, Address


RONALD C. RENNKE D. R. GRIFFIN & ASSOCIATES 1414 ELK STREET ROCK SPRINGS, WYOMING 82901

Telephone Number: <u>(307)</u> 362-5028

This corner record was prepared by me or under my direction and supervision.

Monument Inscripition

SEAL & SIGNATURE



RECORDED 8/09/2011 AT 10:11 AM REC# DEBRA K. LATHROP, CLERK OF LARAMIE CO COUNTY, WY PAGE 1 OF 434

Cross-Index No.: Z-5 Cross-Index No.: A-5

orner Section 32, T 15 N, R 63 W, 6th P.M. 11 12 13 14 15 16 17 18 19 20 Southwest Corner Same as Northwest Corner Section 5, T 14 N, R 63 W, 6th P.M. Wyoming County: <u>Laramie</u>,

SBRPEPLS/PLSW: March 1994; PLSW January 1998