

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: Edwin James, U.S. Deputy Surveyor, July 27, 1870

80.00 Chains Set lime stone 22 x 12 x 6 for corner to sections 12 & 13 in Town15 North Range 65 West.

Found: 4 ins. x 10 ins. x 6 ins. out of ground, broken marked lime stone.

Set: Stone was a well set identifiable original corner and left remaining in found condition. Set a steel fence post witness 2 ft. south and raised a small mound of stone north.




RECORDED 4/24/2013 AT 2:04 PM REC# 614018 JK# 2333 PG# 499
 DEBRA K. LATHROP, CLERK OF LARAMIE COUNTY, WY PAGE 1 OF 1

Date of Field Work: December 17, 2011

Office Reference: Kaiser- Francis Oil Silo Field

CROSS INDEX DIAGRAM

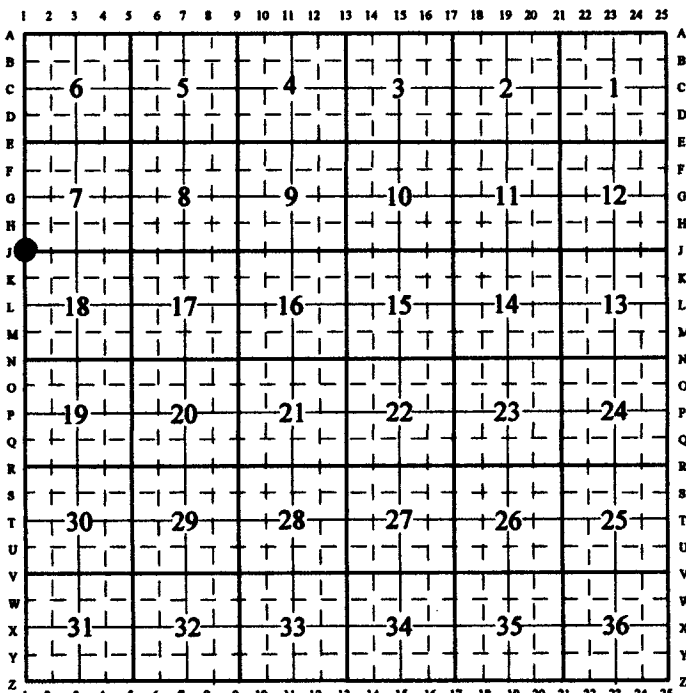


Firm/Agency, Address

Paul Reid, P.L.S.
 1533 Pinion Drive
 Cheyenne WY 82001
 307-637-3400 Office
 307-630-2387 Cell

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

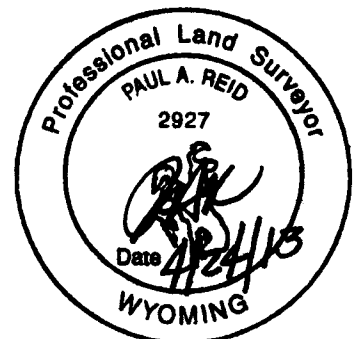

Corner Name: SW Cor. Section: 7 T.15N., R.64W., 6th P.M.,
 SBRPEPLS/PLSW: MARCH 1994/97 T.15N., R.65W., 6th P.M.,

Cross-Index No.: J-1
 J-25