

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: Edwin James, U.S. Deputy Surveyor, June, 1871

80.00 Chains Set a lime stone 20 x 12 x 5 for the corner to sections 7, 8, 17 & 18.

Found: 10 ins. x 4 ins. x 9 ins. out of ground, well marked, firmly set lime stone. Stone was 0.65 ft. east of a railroad tie fence corner post of fences extending N/S/W.

Set: Nothing, corner was well marked, firmly set and witnessed by railroad tie fence corner post.




RECORDED 4/24/2013 AT 2:05 PM REC# 614019 JK# 2333 PG# 500
DEBRA K. LATHROP, CLERK OF LARAMIE COUNTY, WY PAGE 1 OF 1

Date of Field Work: December 17, 2011

Office Reference: Kaiser Francis Oil Silo Field

CROSS INDEX DIAGRAM

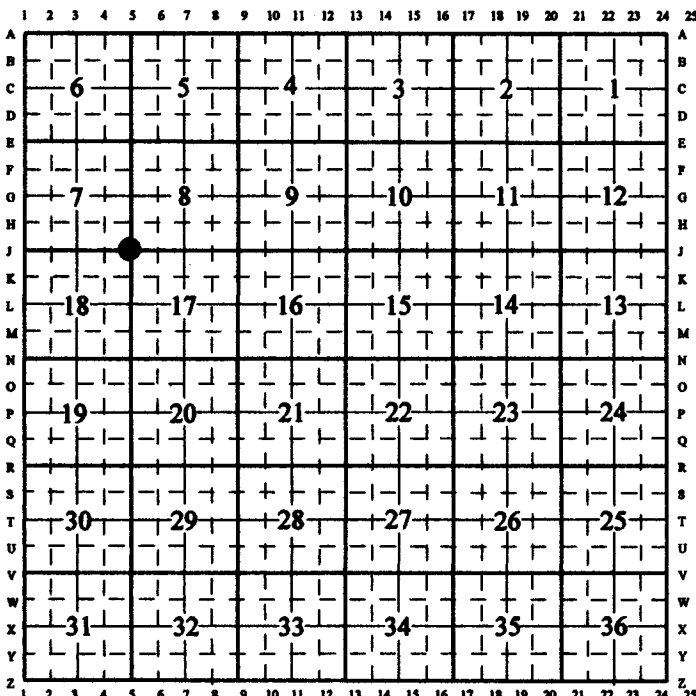


Firm/Agency, Address

Paul Reid, P.L.S.
1533 Pinion Drive
Cheyenne WY
307- 637-3400 Office
307-630-2387 Cell

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

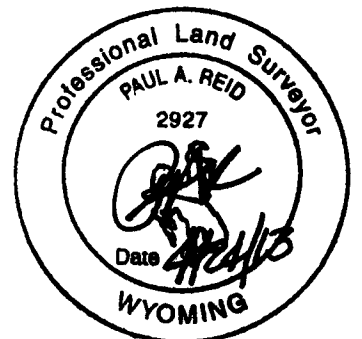

Corner Name: SW Cor. Section: 8
SBRPEPLS/PLSW: MARCH 1994/97

T.15 N., R. 64 W., 6th P.M.,

Cross-Index No.: J-5