

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: Edwin James, U.S. Deputy Surveyor, June 1871

80.00 Chains Set a lime stone 20 x 13 x 7 for corner to Sections 9,10,15 & 16

Subsequent Record: State of Wyoming Corner Record filed August 9, 2006, by Mr. Mark D. Rehwaldt, Wyoming PELS 4259, finding a 6" spike and reestablishing the corner with a 3" diam. alum. cap on No. 5 rebar and T-Post 1.0' South.

Found: Aluminum Cap as noted in the above corner record. I did not find "T-Post 1.0' South".

Set: Set a steel fence post witness 1.0 ft. south and raised a small mound of stone west.




RECORDED 4/24/2013 AT 2:05 PM REC# 614021 JK# 2333 PG# 502
DEBRA K. LATHROP, CLERK OF LARAMIE COUNTY, WY PAGE 1 OF 1

Date of Field Work: March 7, 2013

Office Reference: Kaiser Francis Oil Silo Field

CROSS INDEX DIAGRAM

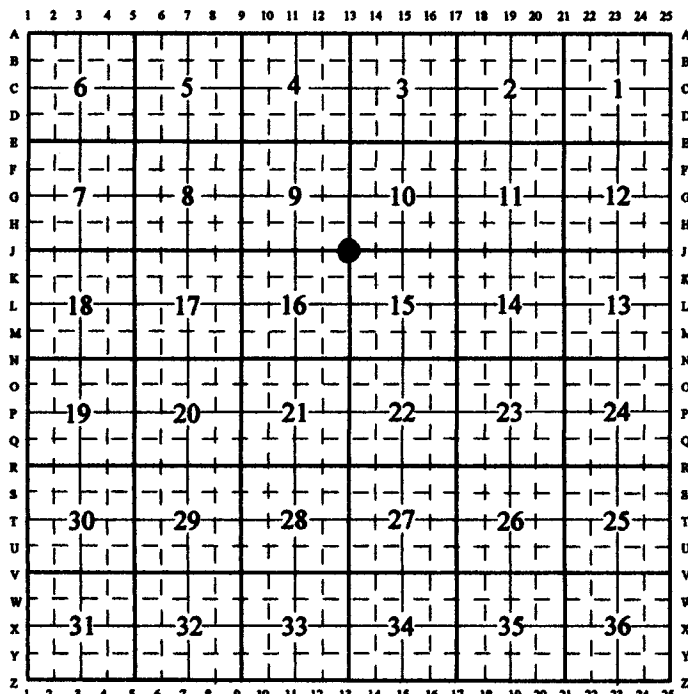


Firm/Agency, Address

Paul Reid, PLS
1533 Pinion Drive
Cheyenne WY 82001
307-637-3400 Office
307-630-2387 Cell

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

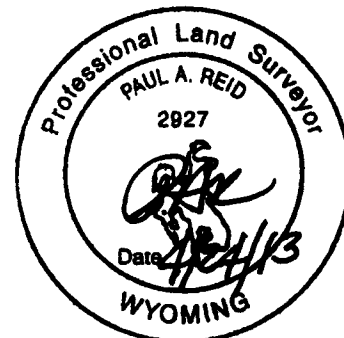

Corner Name: SW Cor. Section: 10 T.15N., R.64W., 6th P.M.,
SBRPEPLS/PLSW: MARCH 1994/97

Cross-Index No.: J-13