State of Wyoming Corner Record

(In compliance with the CORNER PERPETUITION AND PILING ACT, Vyoning Statutes, 1997 Section 33-29-140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.


Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

GLO RECORD: "SET A LIMESTONE 20 X 12 X 4 WITH MOUND OF STONE FOR CORNER TO TOWNSHIPS 14 & 15 N, RANGE 63 & 64 W OF THE 6TH P.M..


MONUMENT FOUND: FOUND #5 REBAR. MONUMENT WAS RECOVERED 0.3' BELOW GRAVEL ROAD SURFACE.

MONUMENT SET: AFFIXED 2" ALUMINUM CAP STAMPED LS 4522 AND 2010 AS SHOWN BELOW.

REFERENCES: FOUND REFERENCE TIES AS SHOWN IN SKETCH BELOW.

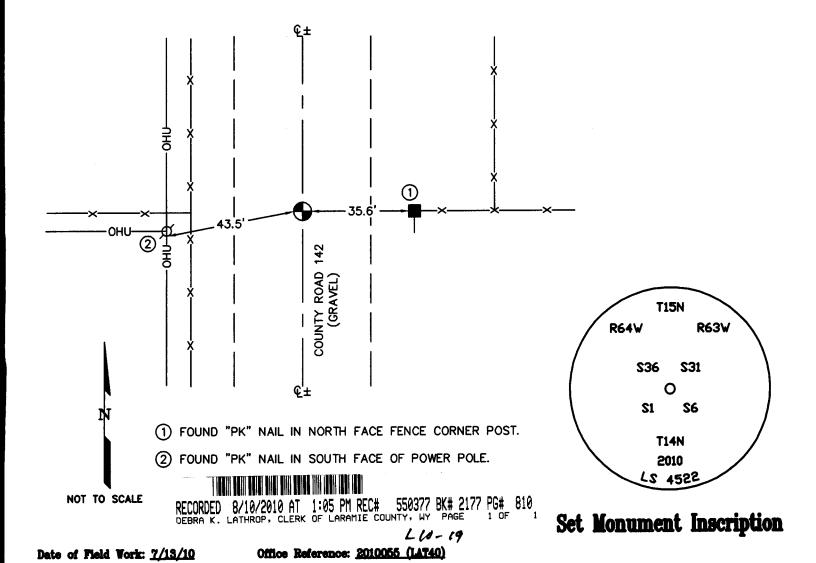

Cross Index Plat

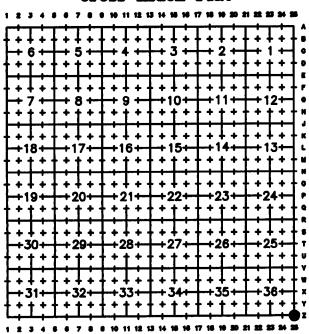


Firm/Agency, Address

Lambert Land Consulting. LLC 417 South Whitcomb Street <u>Fort Collins. Colorado 80521</u>

Telephone Number: <u>970-217-2190</u>

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

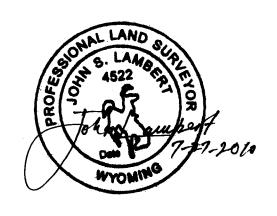

Corner Name SOUTHEAST Corner Section 36, T 15 N, R 64 W, 6th P.M.

Cross-Index No.: <u>Z-25</u>

RPEPLS/PLSW: March 1994; PLSW January 1998

County: LARAMIE Wyoming