State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997 Section 33-29-140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

RECORD:

SET A GRANITE BOULDER 15 X 10 X 5 FOR CORNER TO SECTIONS 25 & 36 T15N R66W.

MONUMENT FOUND:


NOTHING FOUND.

MONUMENT SET:

SET A 5/8" X 24" REBAR WITH A 3 1/4" ALUMINUM CAP PROJECTING 0.3' ABOVE GROUND SURFACE WITH THE CAP STAMPED AS SHOWN. MONUMENT WAS SET BY SINGLE PROPORTION ON THE RANGE LINE.

REFERENCES:

MONUMENT LIES 1' WEST OF A N-S FENCE LINE AND $+\-$ 37' NORTH OF A FENCE CORNER RUNNING N-S-E. NO REFERENCES WERE SET.

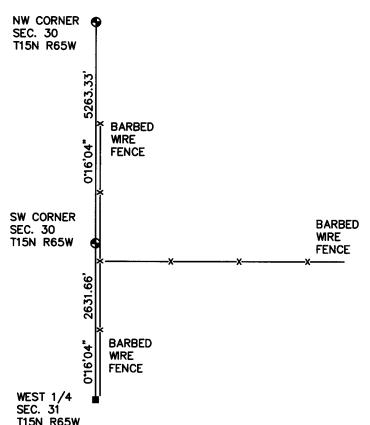


ING R66W R651

Date of Field Work: 8/23/10

Office Reference: 10190

Monument Inscripition

Cross Index Plat



Firm/Agency, Address

SURVEYING SERVICES LLC 19th STREET 82001

Telephone Number: (307) 634-7273

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



Corner Name SW Corner Section 30, T 15 N, R 65 W, 6th P.M.

County: LARAMIE Wyoming

SBRPEPLS/PLSW: March 1994; PLSW January 1998

12/23/2014 AT 4:14 PM BK# 2422 throp. CLERK OF LARAMIE COUNTY, WY

Cross-Index No.: <u>V-1</u>