

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Notes: U.S. Deputy Surveyor, Henry G. Hay, September 26, 1870; 40.00 Chains...Set Granite Boulder 16 x 8 x 6 for 1/4 Sec Cor.

Found: Found a loosely set 7" x 9" x 11" granite stone marked 1/4 on the West face and being 36' East of a old North/South fence line. Also found set below the original stone a No.5 x 20" rebar with non-discernable yellow plastic cap assumed to be set by LS 577 due to the same type of plastic caps and rebars set to the north for the North View Subdivision.

Set: At the corner point, I set a No. 6 x 48" rebar, 43" in the ground with a marked 3 1/2" aluminum cap. Buried the original stone and No.5 rebar as memorials along the west side. Set a 5' steel fence post witness 1' north.

See back of this sheet for ties to adjacent monuments.


Aluminum Cap Markings

T.15N. 1/4 R.66W.
S19 | S20
1996
PLS 2927

LARAMIE COUNTY CLERK
CHEYENNE, WY.
96 MAR 1 PM 12 14
178468

Date of Field Work: 30, Jan., 1996 Office Reference: Job No. 2-1930.95

CROSS INDEX DIAGRAM

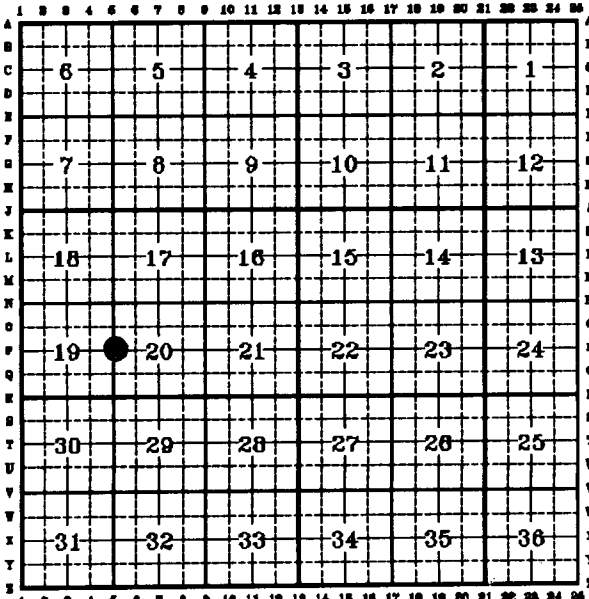

Firm/Agency, Address

Paul A. Reid, A.V.I.p.c.
2035 Westland Road
Cheyenne, WY 82001

Telephone Number:
(307)-634-6017

This corner record was prepared by me or under my direction and supervision.
SEAL & SIGNATURE



Corner Name: E 1/4 Corner Section: 19 T 15N R 66W; 6TH P.M. Cross-Index No.: P-5

SBRPEPLS/PLSW: March 1994

1357

BOOK 1418

BASIS OF BEARINGS: BEARINGS ARE GRID AND BASED UPON THE USE OF THE TRIMBLE GPS TOTAL STATION SYSTEM AND WGS 84 DATUM. THE ORIGIN BEING LOCATED @ A LOCAL CONTROL POINT BEING A 1 1/2" ALUMINUM CAP MARKED "CP WARREN" AT 41° 15' 28.68311"N LATITUDE AND 104° 49' 23.61968"W LONGITUDE AND BEING APPROXIMATELY 1,320' SOUTH AND 1340' EAST OF THE NW CORNER OF SECTION 19, T. 15N., R. 66W., 6TH P.M.

