

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Notes: U.S. Deputy Surveyor, Henry G. Hay, September 26, 1870; 40.00 Chains...Set Granite Boulder 15 x 7 x 6 for 1/4 Sec Cor.

Found: Found a well set, marked, pink colored granite stone, 9" x 6", 7" out of ground. Marked 1/4 on West face and being 1.65' North of a fence corner post of fences extending South and West.


Set: Nothing

See back of this sheet for ties to adjacent monuments.

178472
LARAMIE COUNTY CLERK
CHEYENNE, WY.
96 MAR 1 PM 12 14

Date of Field Work: 31, Jan., 1996 Office Reference: Job No. 2-1930.95

CROSS INDEX DIAGRAM

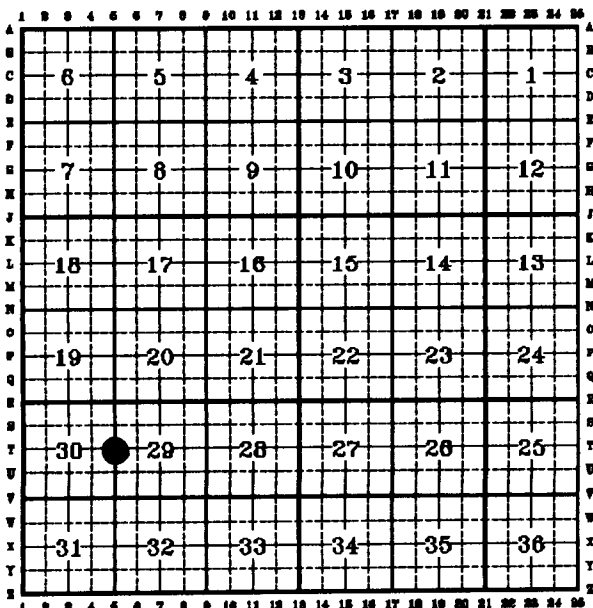

Firm/Agency, Address
Paul A. Reid, A.V.I.p.c.
2035 Westland Road
Cheyenne, WY 82001
 Telephone Number:
(307)-634-6017

This corner record was prepared by me or under my direction and supervision.



Corner Name: E 1/4 Corner Section: 30 T 15N R 66W; 6TH P.M. Cross-Index No.: T-5

SBRPEPLS/PLSW: March 1994

1365

BOOK 1418

