OCTOBER 18, 1976

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

SC		T.15N.
34	35	
3	2	T.14N.

R.66W., 6th P.M.

Corner Re-Established by Single Proportionate Measurement

G.L.O: Record- Granite Boulder, 22"X10"X 6"
Set in
(1870)
Not Found

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the Corner — Set a 2" dia. X 30" long iron pipe with Brass Cap

Accessories — Raised Rock Mound to East of Monument

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

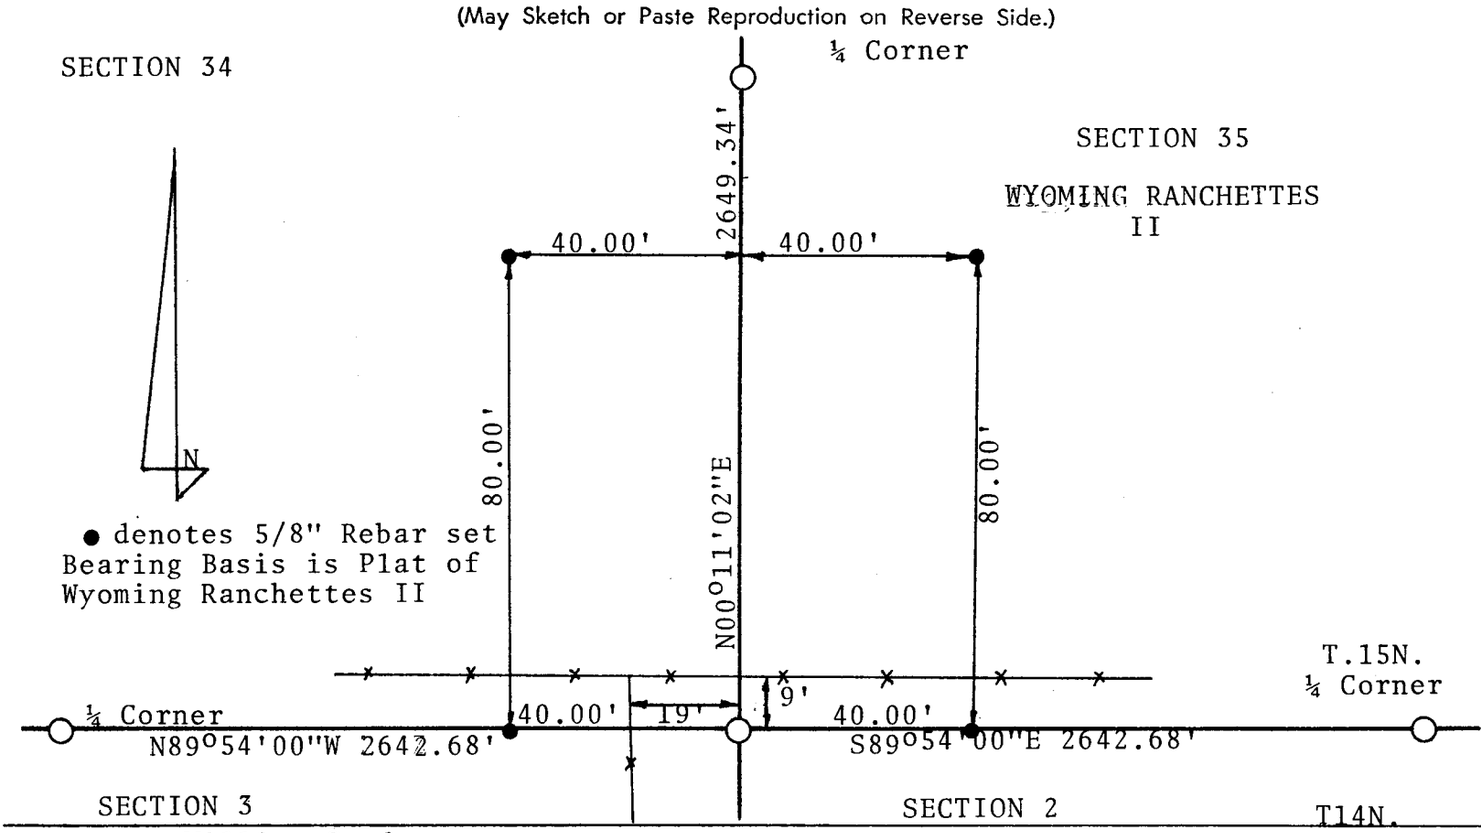

I, William Condrey certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

William Condrey — Signature of Surveyor
Wyoming L.S. No. 577 — Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of Laramie

This "corner record" was filed for record on the 20 day of October, 1976, was noted on the cross-index plat and is assigned page No._____, in book No._____.

Janet C Whitehead
County Official

Cross Index No. 9-17 T. 14 R. 66 Mer.
2-17 T. 15 R. 66 Mer.
T. R. Mer.
T. R. Mer.
T. R. Mer.
T. R. Mer.
T. R. Mer.

Z-17 15-66

414936

The State of Wyoming
County of Laramie } SS

This instrument was filed for record at 1153 o'clock A M. on the 20 day of Oct A. D. 19 76 and duly recorded in book ..... on page .....

Janet C Whitehead

County Clerk & Ex-Officio Register at Deeds

By ..... Deputy