

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

LOCATION

Found "WCCR" stones (set by County Surveyor) as shown on sketch.

S. 2 S. 1
S.11 S.12


T.15N., R.67W.
6th P.M.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner: No monument set (Corner falls in paved road)

Accessories: Set a 1½" dia. x 30" long iron pipe with brass, as a Witness Corner, N 0°45' E, 40.00 feet distant.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

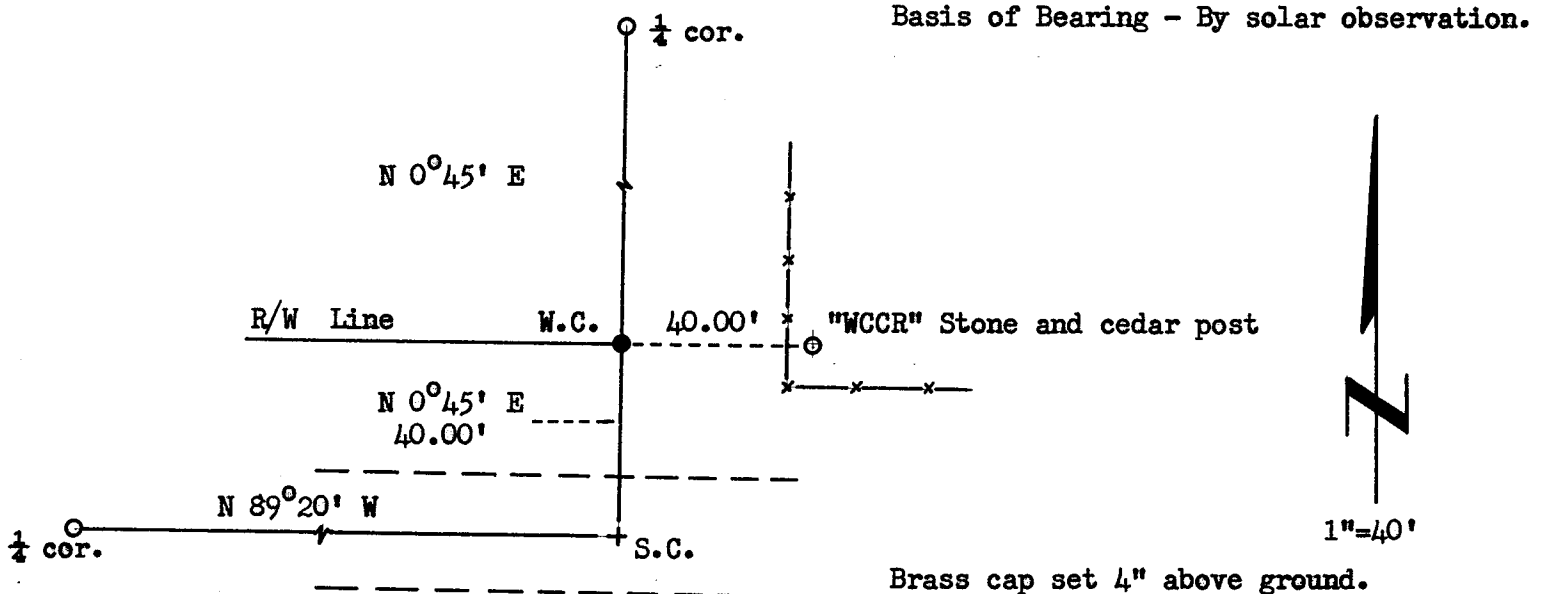

Brass cap set 4" above ground.

Brass cap stamped:

T.15N. R.67W.

W.C.

S. 2 S. 1

S.11 S.12

LS 519 1973

BRANCH OF COUNTY ROAD NO. 100

R/W Line

"WCCR" Stone

I, R.L. Hudson certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson
Signature of Surveyor

Wyoming L.S. No. 519
Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of Darame

This "corner record" was filed for record on the 29th day of May, 1973, was noted on the cross-index plat and is assigned page No. 15-67, in book No. ONE.

John B. Hillman
County Official

Cross Index No.	T. _____	R. _____	Mer.
	T. _____	R. _____	Mer.
	T. _____	R. _____	Mer.
	T. _____	R. _____	Mer.
	T. _____	R. _____	Mer.
	T. _____	R. _____	Mer.
	T. _____	R. _____	Mer.

289693

Photographed ~~_____~~
Indexed ✓
Posted M

The State of Wyoming }
County of Laramie } SS

This instrument was filed for record
at 1:54 o'clock PM on the
29 day of May
A. D. 1913 and duly recorded in
Book _____ on page _____

John B. Williams

Clerk & Ex-Officio Register of Deeds
Theresa August Deputy