

**CERTIFIED LAND CORNER RECORDATION**


**DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)**

Found: at the West  $\frac{1}{4}$  Section Corner of Section 19, a loose granite stone 13"x10"x8" with 2 notches on one side and 3 notches on the other side. Survey of 1870 shows a granite boulder 14"x8"x6".

**DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

Reset: granite stone in place.

**SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY. (May Sketch or Paste Reproduction on Reverse Side.)**

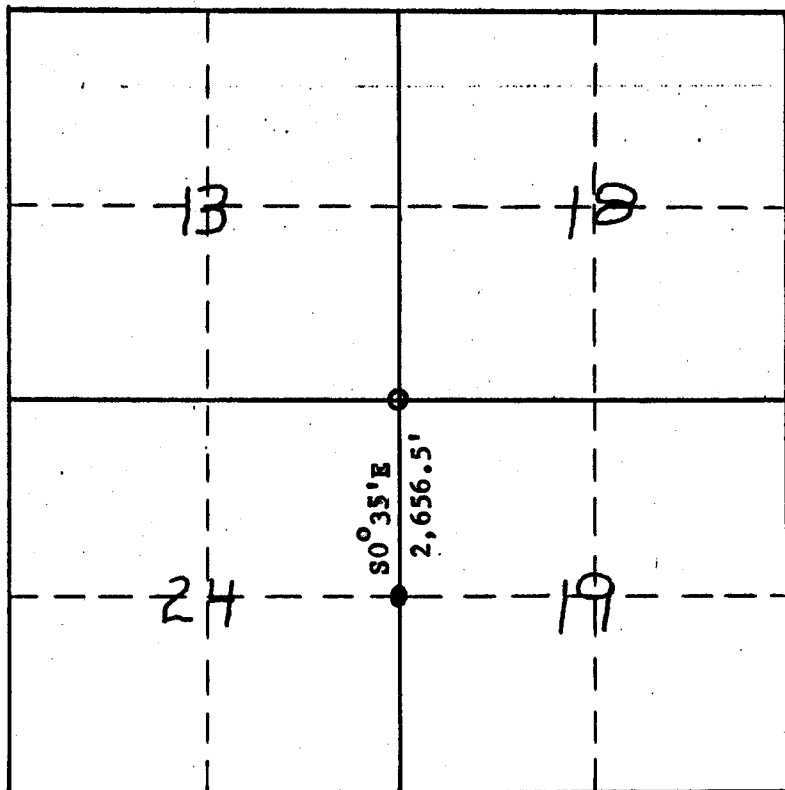

Section 19 T 15N R 67W

- corner filed — this form
- controlling corner

Details

I, William H. Smith certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

*William H. Smith*  
Signature of Surveyor

470  
Registration No.

STATE OF WYOMING,  
Office of Clerk and Recorder,  
County of Taramie

This "corner record" was filed for record on the 24 day of March, 19 75, was noted on the cross-index plat and is assigned page No. \_\_\_\_\_, in book No. Filed

*Janet C. Whitehead*  
County Official

Cross Index No. <u>P 1</u>	T. <u>15</u>	R. <u>67</u>	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.

Township \_\_\_\_\_, Range \_\_\_\_\_, Principal Meridian \_\_\_\_\_

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

353266

Photographed   
 Indexed   
 Posted   
 Assessor

The State of Wyoming }  
 County of Laramie } SS

This instrument was filed for record  
 at 157 o'clock P M. on the  
 24 day of March  
 A. D. 19 21 and duly recorded in  
 book \_\_\_\_\_ on page 1111

*James C. Whithead*

County Clerk & Ex-Officio Register at Deeds  
 By *Bert Hansen* Deputy

○ Iron Pipe and Brass Cap  
 ◇ Stone