




**Directions for using the  
Cross Index Plat**

Section, quarter and sixteenth corners will be marked with a dot at the corner location. The alpha-numeric coordinate number is then determined for the intersection of the two lines. A corner that applies to two or more townships shall be filed under all that apply by the use of photo copies.

Closing corners will be indexed under the township in which they control ownership. For 1/64, 1/256, 1/1024 and non-aliquot corners lying between grid designations, mark the appropriate grid area with a dot and use the index code to the north and west (local systems may be used if the method is approved by the County Surveyor or Clerk and a written description of its use is filed in the front of each book of certificates).

**Cross Index Plat**

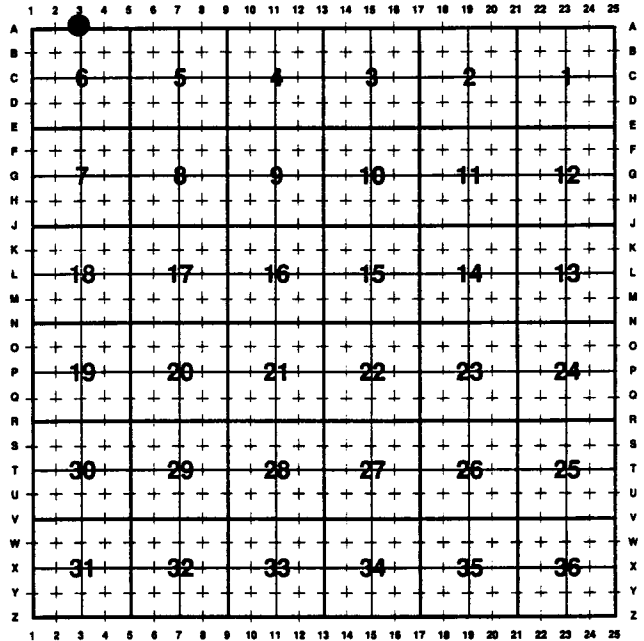

**State Plane Coordinates (optional)**

Zone      W      WC      EC      E      feet/meters

NAD 1927       NGVD 1929       NAD 1983       NAVD 1988

North (Y) = \_\_\_\_\_ East (X) = \_\_\_\_\_ EL = \_\_\_\_\_

Latitude \_\_\_\_\_ Longitude \_\_\_\_\_

Scale Factor \_\_\_\_\_ Geoid Height \_\_\_\_\_

**Certification**

I, Peter J. Hutchison, Wyoming PLS/PE 707 certify that I, or others under my supervision, have performed the work as described above and completed this form.


Company or Agency Jack Noblitt & Associates

Mailing Address 1902 Thomas Ave. Suite 620

Street Address \_\_\_\_\_

City, State, ZIP Cheyenne Wyoming 82001

Telephone, FAX 307 634 9064

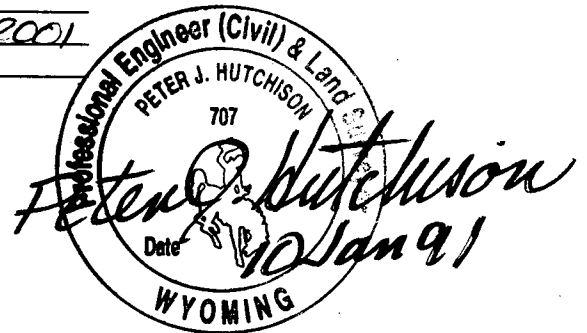

Signature, Seal, and Date

Sheet \_\_\_\_\_ of \_\_\_\_\_