

**CERTIFIED LAND CORNER RECORDATION**


DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

LOCATION Found 10" x 14" x 16" granite boulder with grooves, in place.  
 S.30 S.29 G.L.O. record - Granite boulder, 24 x 20 x 18. Contract survey by  
 S.31 S.32 Henry G. Hay in 1871.  
 T.15N., R.69W.  
 6th P.M.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner: Set a 1/2" dia. x 30" long iron pipe with brass cap.  
 Accessories: Raised a rock mound, 2 feet south of corner monument.  
 Left stone as memorial.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.  
 (May Sketch or Paste Reproduction on Reverse Side.)

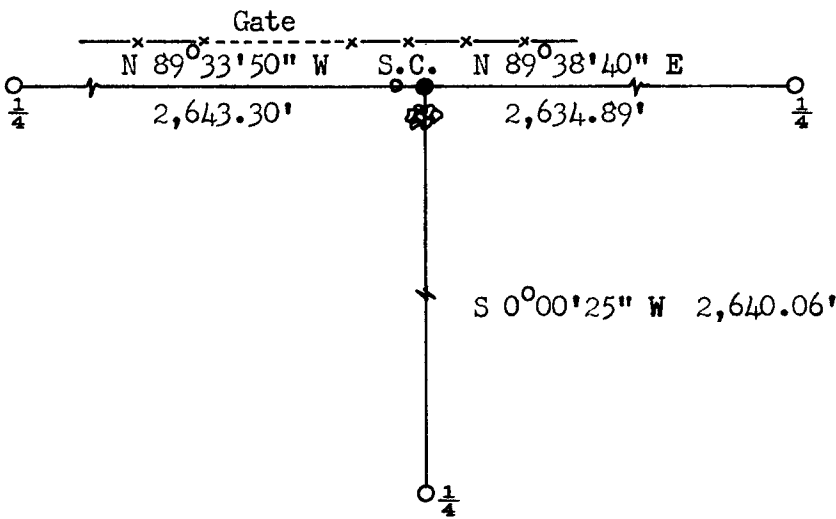

Brass cap set 6" above ground.

Brass cap stamped:

T.15N. R.69W.  
 S.C.  
 S.30 S.29  
 S.31 S.32  
 LS 519 1972

I, R.L. Hudson certify that I have carefully performed ~~or reviewed~~ the work done on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson Wyoming L.S. No. 519  
 Signature of Surveyor Registration No.

STATE OF WYOMING,  
 Office of Clerk and Recorder,  
 County of Laramie

This "corner record" was filed for record on the 30<sup>th</sup> day of October, 1972, was noted on the cross-index plat and is assigned page No. 1569, in book No. ONE.

John B. Williamson  
 County Official

Cross Index No. _____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____

The State of Wyoming } ss  
County of Laramie }

This instrument was filed for record  
at 2:03 o'clock P. M. on the  
5th day of October  
A. D. 1922 and duly recorded in  
Book .....

*[Handwritten Signature]*

County Clerk & Ex-Officio Register of Deeds  
Deputy