

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)


LOCATION S.29 S.28 S.32 S.33 T.15N., R.69W. 6th P.M.	Found 10" x 10" x 20" granite stone with grooves, leaning against fence corner post. Fence corner post accepted as corner position. G.L.O. record - Granite boulder, 20 x 14 x 12. Contract survey by Henry G. Hay in 1871.
--	---

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner: No monument set.

Accessories: Set a 1½" dia. x 30" long iron pipe with brass cap, as a witness corner, S 0°10'25" E, 5.00 feet distant.
 Left stone as memorial.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
 (May Sketch or Paste Reproduction on Reverse Side.)

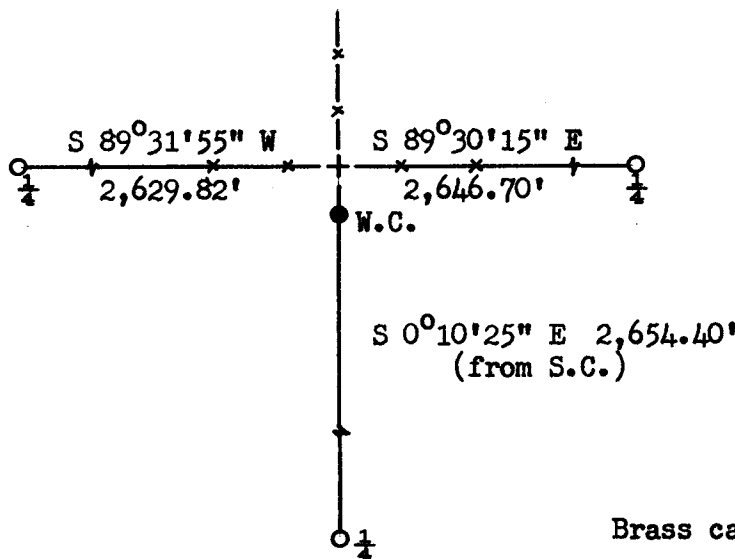

Brass cap set 6" above ground.

Brass cap stamped:

T.15N. R.69W.
 W.C.
 S.29 S.28
 S.32 S.33
 LS 519 1972

I, R.L. Hudson certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson
 Signature of Surveyor

Wyoming L.S. No. 519
 Registration No.

STATE OF WYOMING,
 Office of Clerk and Recorder,
 County of Laramie

This "corner record" was filed for record on the 30th day of October, 1972, was noted on the cross-index plat and is assigned page No. 15-69, in book No. ONA

Joley B. Hillman
 County Official

Cross Index No. _____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____

The State of Wyoming }
County of Laramie } 89

This instrument was filed for record

at 2:43 o'clock P.M. on the

30th day of October

A. D. 1972 and duly recorded in

Book..... our pages.....



County Clerk & RECORDER Register of Deeds
Deputy