

CERTIFIED LAND CORNER RECORDATION


DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

LOCATION Found 8" x 8" x 16" granite stone with grooves, in place.
 S.31 S.32 G.L.O. record - Granite boulder, 16 x 12 x 10.
 S. 6 S. 5
 T.15N.,R.69W.
 T.14N.,R.69W.
 6th P.M.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner: Set a 1½" dia. x 30" long iron pipe with brass cap.
 Accessories: A concrete nail, set in a small granite outcrop bears S 6°08'45" E, 121.78 feet distant.
 A 4" x 4" Redwood post, 4' long set 18" in the ground bears SE'yly, 3 feet.
 Left stone as memorial.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
 (May Sketch or Paste Reproduction on Reverse Side.)

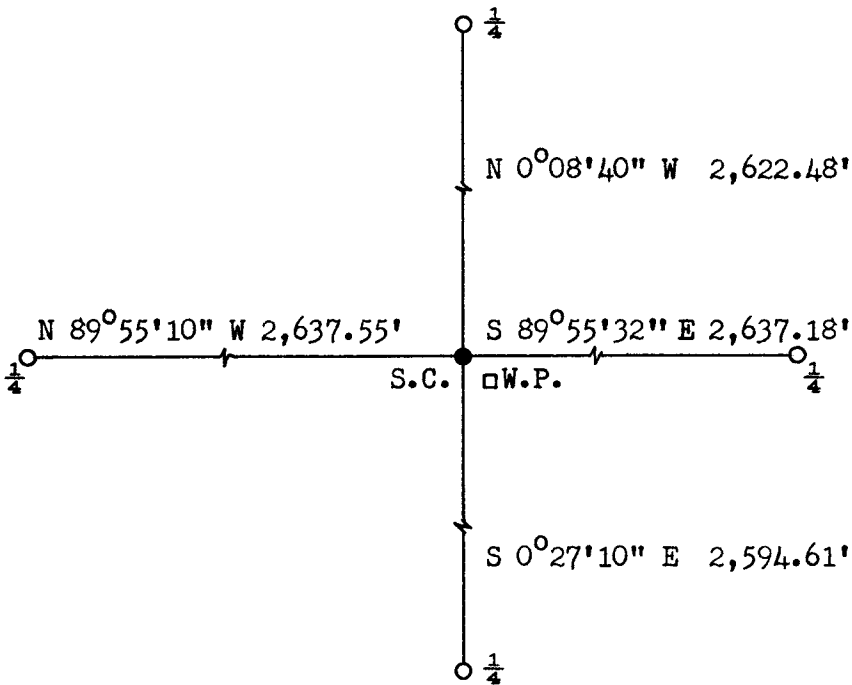

Brass cap set 6" above ground.

Brass cap stamped:

T.15N. R.69W.

S.C.

S.31 S.32

S. 6 S. 5

T.14N.

LS 519 1972

I, R.L. Hudson certify that I have carefully performed ~~or reviewed~~ the work done on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson
Signature of Surveyor

Wyoming L.S. No. 519
Registration No.

STATE OF WYOMING,
 Office of Clerk and Recorder,
 County of Laramie

This "corner record" was filed for record on the 30th day of October, 1972, was noted on the cross-index plat and is assigned page No. 15-69, in book No. ONE

Jody B. Williamson
County Official

Cross Index No. <u>14N</u>	T. <u>69W</u>	R. <u>6th</u>	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.

The State of Wyoming } SS
County of Laramie

This instrument was filed for record
at 2:04 o'clock P. M. on the
5th day of October
A. D. 1922 and duly recorded in
Book of page

John B. McMillan

County Clerk & Ex-Officio Register of Deeds
Deputy