


Wyoming Certified Land Corner Recordation Certificate

This form is to be completed in accordance with W.S. 36-11-101, printed in black ink or typed, and shall be for one individual corner.


Describe below, or show in sketch attached to this form, the corner evidence found. Include condition and type of monument, accessories and ties. Describe any maintenance or rehabilitation performed. In the circle to the right, show monument inscription. If monument is determined lost or obliterated, restate the GLO or BLM original field note record; describe or show the procedure used to reestablish the corner and all data as above for a found monument.

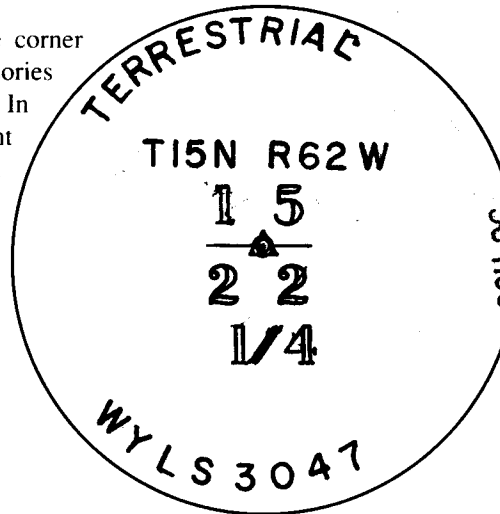

124494
 RECEIVED
 LARAMIE COUNTY
 CHEYENNE, WY.

JUN 6 PM 3 01

Field Date _____ Office Reference _____

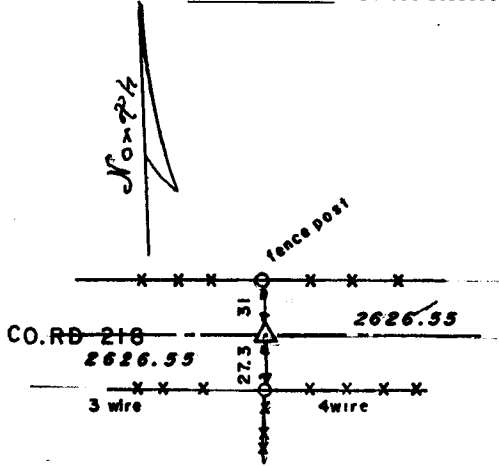

Monument Inscription

J.W.Hammond survey in the year 1874 performed under GLO contract, called for a sand stone 18x12x6.

The stone was not found and this corner was set mid point between by single proportion and marked by a rebar 36" in length with an Aluminum Cap marked as shown. This corner is burried approximatley 10" below the surface of County Road 218.

State of Wyoming

Office of County Clerk

County of _____

This Certified Land Corner Recordation Certificate was filed for record on the _____ day of _____, 19 __, in Book No. T _____, R _____, on Alpha-Numeric coordinates _____ and was noted on the Cross Index Plat.

County Clerk

Corner Type:

Aliquot Corner Other

Section(s) 15/22 Meridian 6th P.M.

Corner Name 1/4 N-15 Township T15N Range R62W Page _____

Sheet _____ of _____

Directions for using the Cross Index Plat

Section, quarter and sixteenth corners will be marked with a dot at the corner location. The alpha-numeric coordinate number is then determined for the intersection of the two lines. A corner that applies to two or more townships shall be filed under all that apply by the use of photo copies.

Closing corners will be indexed under the township in which they control ownership. For 1/64, 1/256, 1/1024 and non-aliquot corners lying between grid designations, mark the appropriate grid area with a dot and use the index code to the north and west (local systems may be used if the method is approved by the County Surveyor or Clerk and a written description of its use is filed in the front of each book of certificates).

Cross Index Plat

15

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	
A																										
B																										
C						6																				
D							5																			
E								4																		
F									3																	
G										2																
H																										
J																										
K																										
L																										
M																										
N																										
O																										
P																										
Q																										
R																										
S																										
T																										
U																										
V																										
W																										
X																										
Y																										
Z																										
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	

State Plane Coordinates (optional)

Zone W WC EC E feet/meters

NAD 1927 NGVD 1929 NAD 1983 NAVD 1988

North (Y) = 217153.65 East (X) = 738050.83 EL = 5470±

Latitude _____ Longitude _____

Scale Factor .000007344 Geoid Height _____

Certification

I, Larry T. Perry, Wyoming ~~PKSXXX~~ LS3047 certify that I, or others under my supervision, have performed the work as described above and completed this form.

Company or Agency Terrestrial Surveying & Mapping Co.

Mailing Address P.O.Box82

Street Address 1127 Terry Ranch Road

City, State, ZIP Cheyenne, Wyoming 82003

Telephone, FAX (307)634-9360



Signature, Seal, and Date

Sheet _____ of _____