

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: J. Wesley Hammond, U.S. Deputy Surveyor, July 28, 1872.
40.00 Chains Set sand stone 16 x 12 x 3 for 1/4 sec. cor.


Subsequent Record: Laramie County Road Records, County Field Book No. 7, circa October 1, 1909, indicates the road was surveyed and notes "Set two C.R. Stones, E & W. Cor. in place"

Found: No evidence of previous survey monumentation.

Set: At the center line intersection of Laramie County Road No. 149 and latitudinally with a long time fence extending westerly, I set a No. 5 x 24" rebar with 2 1/2" diameter aluminum cap, marked as noted below, flush to the asphalt surface of said County Road. Said fence line being harmoniously related to other found and accepted corners north and south and the original record. This position is accepted as a faithful perpetuation of the original survey.

See back of this sheet for measurements to other found and or set and accepted corners in the area.

Aluminum Cap Markings



Date of Field Work: February 13, 2003

Office Reference: Burns North 26109


CROSS INDEX DIAGRAM

A	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
B																									
C		6																							
D			5																						
E				4																					
F					3																				
G						2																			
H							1																		
I																									
J																									
K																									
L																									
M																									
N																									
O																									
P																									
Q																									
R																									
S																									
T																									
U																									
V																									
W																									
X																									
Y																									
Z																									

Firm/Agency, Address

Paul A. Reid, PLS
1533 Pinion Drive
Cheyenne WY
Phone (307) 637-3400

This corner record was prepared by me or under my direction and supervision.
SEAL & SIGNATURE

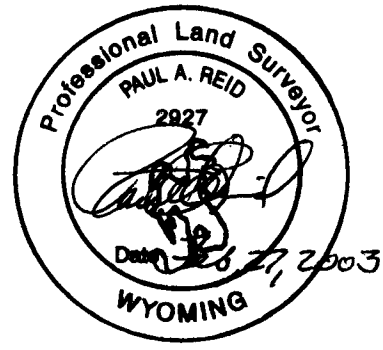

Corner Name: W 1/4 Corner, Section: 32, T.16 N., R. 62 W., 6th P.M., Cross-Index No.: X-5
SBRPEPLS/PLSW: MARCH 1994/97

S.30 S.29
2 1/2" N. CAP
"PLS 292T"

N 0° 01' 26" W
2640.75

S.30 S.29
S.31 S.32
2 1/2" N. CAP
"PLS 292T"

N 0° 21' 19" W
2638.47

S.31 S.32
2 1/2" N. CAP
"PLS 292T"

N 0° 20' 34" W
2639.57

T. 16 N., R. 62 W., 6TH P.M.

S.31 S.32
2 1/2" N. CAP
"PLS 292T"

S.6 S.5

T. 15 N., R. 62 W., 6TH P.M.

N 0° 41' 17" W
5284.56

S.6 S.5
S.7 S.8
2 1/2" N. CAP
"PLS 292T"

N 0° 47' 16" W
2636.66

S.7 S.8
2 1/2" N. CAP
"PLS 292T"

Bearings are grid and based upon the Wyoming
East Zone NAD 83. Geodetic bearings can
be derived by applying -0° 32' 21" to the bearing.