

Wyoming Certified Land Corner Recordation Certificate

This form is to be completed in accordance with W.S. 36-11-101, printed in black ink or typed, and shall be for one individual corner.

Describe below, or show in sketch attached to this form, the corner evidence found. Include condition and type of monument, accessories and ties. Describe any maintenance or rehabilitation performed. In the circle to the right, show monument inscription. If monument is determined lost or obliterated, restate the GLO or BLM original field note record; describe or show the procedure used to reestablish the corner and all data as above for a found monument.


Field Date 4-11-90 Office Reference _____

After extensive field search, if was determined the best evidence for the re-establishment of the corner was the westerly extension of the fence line on the southerly line of the SW1/4 of Section 14 intersected with the center of the ROW fences of County Road 146.


GLO notes attached.

Monument set: #5 rebar with 2" aluminum cap stamped as shown; 6" below gravel road.

References: P-K nails with 1-1/2" galvanized washers stamped "5014".

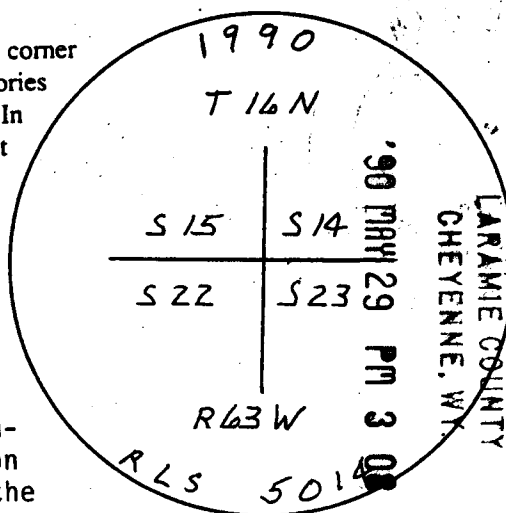

Monument Inscription

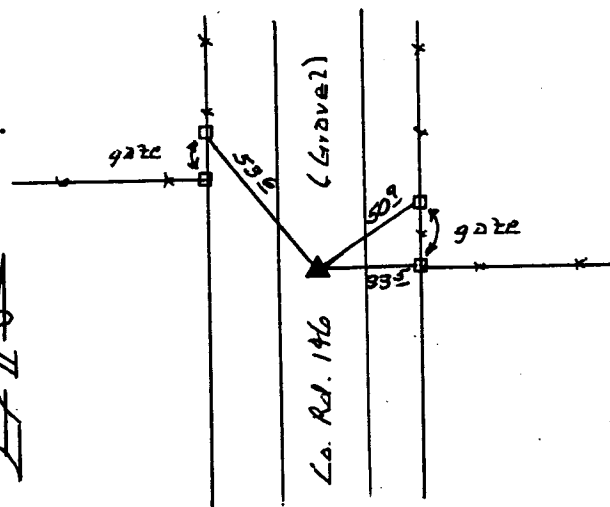

State of Wyoming
Office of County Clerk
County of Laramie

This Certified Land Corner Recordation Certificate was filed for record on the _____ day of _____, 19 ____, in Book No. T _____, R _____, on Alpha-Numeric coordinates N 17 and was noted on the Cross Index Plat.

County Clerk

Corner Type:
☒ Aliquot Corner ☐ Other

Section(s) 14 Meridian 6th

Corner Name Section Township 16 N. Range 63 W. Page _____

Sheet 1 of 3

Directions for using the Cross Index Plat

Section, quarter and sixteenth corners will be marked with a dot at the corner location. The alpha-numeric coordinate number is then determined for the intersection of the two lines. A corner that applies to two or more townships shall be filed under all that apply by the use of photo copies.

Closing corners will be indexed under the township in which they control ownership. For 1/64, 1/256, 1/1024 and non-aliquot corners lying between grid designations, mark the appropriate grid area with a dot and use the index code to the north and west (local systems may be used if the method is approved by the County Surveyor or Clerk and a written description of its use is filed in the front of each book of certificates).

Cross Index Plat

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	
A																										
B																										
C		6				5				4				3					2							
D																										
E																										
F																										
G		7				8				9				10					11					12		
H																										
J																										
K																										
L																										
M		18				17				16				15					14					13		
N																										
O																										
P		19				20				21				22					23					24		
Q																										
R																										
S																										
T		30				29				28				27					26					25		
U																										
V																										
W																										
X		31				32				33				34					35					36		
Y																										
Z																										
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	

State Plane Coordinates (optional)

Zone W WC EC E feet/meters

☐ NAD 1927 ☐ NGVD 1929 ☐ NAD 1983 ☐ NAVD 1988

North (Y) = _____ East (X) = _____ EL = _____

Latitude _____ Longitude _____

Scale Factor _____ Geoid Height _____

Certification

I, Raymond E. Connin, Wyoming PLS-DEX 5014 certify that I, or others under my supervision, have performed the work as described above and completed this form.

Company or Agency Hall & Walters, Inc.

Mailing Address _____

Street Address 873 North Cleveland

City, State, ZIP Loveland, CO 80537

Telephone, FAX 303-663-1177



Signature, Seal, and Date

Sheet 2 of 3

78. 138

Township 16 North Range 63 West

Chains between sections 23 & 26

40.00 Det a granite boulder 16 x 8 x 6
for quarter section corner80.00 Corner to sections 22, 23, 26 & 27
Rolling 2nd rate soil grass good
xNorth Between sections 22 & 23
Variation 15.38 E40.00 Det a granite boulder 16 x 7 x 6
for quarter section corner80.00 Det a granite boulder 18 x 10 x 8
for corner to sections 14, 15, 22 & 23
Surface level soil 2nd rate grass
good
x~~East On a Random line
between sections 14 & 23
Variation 15.38 E~~

40.00 Det a temporary 1/4 section corner

80.00 Intersect N & S line 52 links

South of corner to sections 13, 14 & 23

139 #

Township 16 North Range 63 West

Chains 24 from which corner I run
S 89.38 W On a true line
between sections 14 & 2340.00 Det a granite boulder 17 x 10 x 6
for quarter section corner80.00 Corner to sections 14, 15, 22 & 23
Rolling 2nd rate soil grass good
xNorth Between sections 14 & 15
Variation 15.40 E40.00 Det a granite boulder 16 x 9 x 6
for quarter section corner

61.50 Dry run 40 links wide N of E

80.00 Det a granite boulder 19 x 10 x 6
for corner to sections 10, 11, 14 & 15
Same rolling soil 2nd rate
x~~East On a Random line
between sections 11 & 14
Variation 15.40 E~~

40.00 Det a temporary quarter section

0211

7855-7006