


BOOK 1287

Wyoming Certified Land Corner Recordation Certificate

This form is to be completed in accordance with W.S. 36-11-101, printed in black ink or typed, and shall be for one individual corner.

Describe below, or show in sketch attached to this form, the corner evidence found. Include condition and type of monument, accessories and ties. Describe any maintenance or rehabilitation performed. In the circle to the right, show monument inscription. If monument is determined lost or obliterated, restate the GLO or BLM original field note record; describe or show the procedure used to reestablish the corner and all data as above for a found monument.

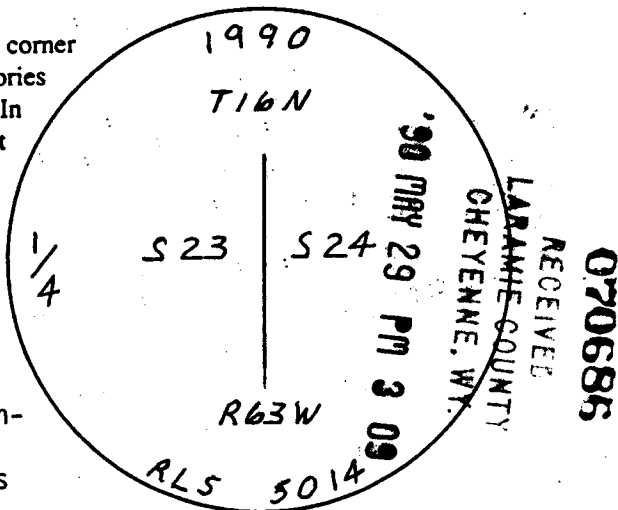


Field Date 4-13-90 Office Reference _____

After extensive field search, it was determined the best evidence for the re-establishment of the corner was the straight-line proportion between the found section corners on the westerly line of Section 24.

Monument set: #5 rebar with 2" aluminum cap stamped as shown; flush with ground.

References: P-K nails with 1-1/2" galvanized washers stamped "5014".

Monument Inscription

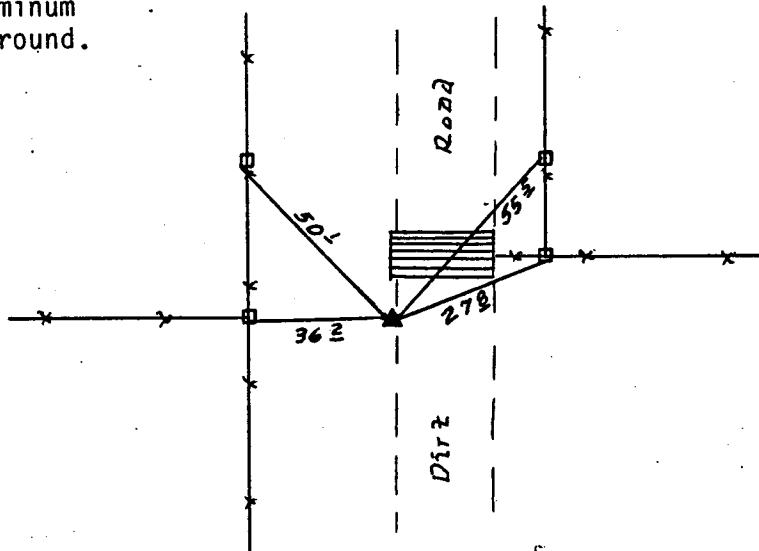

State of Wyoming
Office of County Clerk
County of Laramie

This Certified Land Corner Recordation Certificate was filed for record on the _____ day of _____, 19 __, in Book No. T _____, R _____, on Alpha-Numeric coordinates P-21 and was noted on the Cross Index Plat.

County Clerk

Corner Type:
 Aliquot Corner Other

Section(s) 24 Meridian 6th

Corner Name Quarry Township 16N Range 63W Page _____

Sheet 1 of 3

BOOK 1287

1159

**Directions for using the
Cross Index Plat**

Section, quarter and sixteenth corners will be marked with a dot at the corner location. The alpha-numeric coordinate number is then determined for the intersection of the two lines. A corner that applies to two or more townships shall be filed under all that apply by the use of photo copies.

Closing corners will be indexed under the township in which they control ownership. For 1/64, 1/256, 1/1024 and non-aliquot corners lying between grid designations, mark the appropriate grid area with a dot and use the index code to the north and west (local systems may be used if the method is approved by the County Surveyor or Clerk and a written description of its use is filed in the front of each book of certificates).

Cross Index Plat

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
B	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+
C	6				5				4				3				2				1				
D	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
E	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
F	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+
G	7				6				5				4				3				2				
H	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
J	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
K	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+
L	18				17				16				15				14				13				
M	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
N	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
O	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+
P	19				20				21				22				23				24				
Q	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
R	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
S	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+
T	30				29				28				27				26				25				
U	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
V	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
W	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+	-	-	-	+
X	31				32				33				34				35				36				
Y	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
Z	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+

State Plane Coordinates (optional)

Zone W WC EC E feet/meters

NAD 1927 NGVD 1929 NAD 1983 NAVD 1988

North (Y) = _____ East (X) = _____ EL = _____

Latitude _____ Longitude _____

Scale Factor _____ Geoid Height _____

Certification

I, Raymond E. Connin, Wyoming PLS-~~85~~ 5014 certify that I, or others under my supervision, have performed the work as described above and completed this form.

Company or Agency Hall & Walters, Inc.

Mailing Address _____

Street Address 873 North Cleveland

City, State, ZIP Loveland, CO 80537

Telephone, FAX 303-663-1177



Raymond E. Connin
Signature, Seal, and Date

1287

Township 16 North Range 63 West
 Chains for corner to sections 23, 21, 25, 26
 Surface setting glass gage
 On a Ranion line
 Between sections 21 & 25
 Variation 15.35° E
 116.00 Set temporary 1/4 section corner
 80.00 Intersect 22 links south of
 corner to sections 21 & 25 from
 which corner I run
 S 89.51° W On a true line between
 sections 21 & 25
 116.00 Set a granite boulder 12x10x7
 for quarter section corner
 80.00 Corner to sections 23, 21, 25 & 26
 Surface level grass good
 North Between sections 23 & 21
 Variation 15.35° E
 116.00 Set a granite boulder 10x8x5
 for quarter section corner
 80.00 Set a granite boulder 14x10x7

38
 25-30
 24
 51-56
 26
 28
 11
 11

253

271

255

256

Township 16 North Range 63 West
 Chains for corner to sections 13, 11, 23, 24
 Surface setting glass gage
 On a Ranion line
 Between sections 13 & 21
 Variation 15.35° E
 116.00 Set temporary 1/4 section corner
 79.42 Intersect east boundary of
 the township 36 links south
 of corner to sections 13 & 21
 from which corner I run
 S 89.45° W On a true line
 between sections 13 & 21
 39.96 Set a granite boulder 16x8x7
 for quarter section corner
 79.42 Section corner to 13, 11, 23 & 24
 same setting (old & new)
 grass good

11
 19
 20
 41
 20

