

**CERTIFIED LAND CORNER RECORDATION**

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)


LOCATION \

T 16 N	Found sandstone 24" x 14" x 7" set. Leaning @ 15° angle
R 63 W 36 31 R 62 W	to west. <u>6</u> marks visible on all 4 sides.
16	
T 15 N	G.L.O. record - unknown.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Straightened stone and cheisled X on top.  
Set steel rods as shown on sketch for witness corners.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.  
(May Sketch or Paste Reproduction on Reverse Side.)

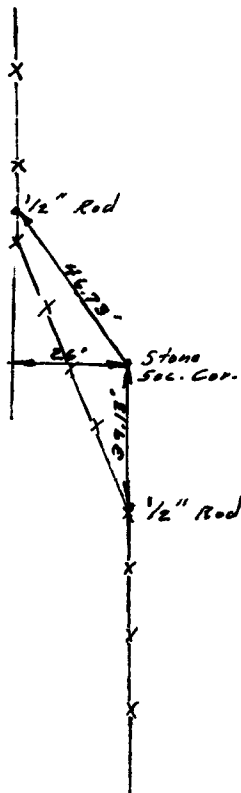

No ties to adjacent corners.

I, Robert C. Corbet certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

*Robert C. Corbet*  
Signature of Surveyor

LS 495  
Registration No.

STATE OF WYOMING,  
Office of Clerk and Recorder,  
County of Saravie

This "corner record" was filed for record on the 6 day of January, 1975, was noted on the cross-index plat and is assigned page No. \_\_\_\_\_, in book No. \_\_\_\_\_.

*James C. Whitehead*  
County Official

Cross Index No. <u>X3, 25</u>	T. <u>16</u>	R. <u>63-6</u>	Mer.
	T. <u>15</u>	R. <u>62</u>	Mer.
	T. _____	R. _____	Mer.
	T. _____	R. _____	Mer.
	T. _____	R. _____	Mer.
	T. _____	R. _____	Mer.
	T. _____	R. _____	Mer.

①  
Z-25      16-63

Photographed

Indexed B

Posted

Assessor

The State of Wyoming  
 County of Laramie

This instrument was filed for record  
 at 1:36 o'clock P. M. on the  
6 day of January,  
 A. D. 1928 and duly recorded in  
 Book \_\_\_\_\_ on page \_\_\_\_\_

*Quinn Callister*

County Clerk & Ex-Officio Registrar of Deeds  
 By [Signature] Deputy