

T.16N.,R.64W., 6th P.M.
1/4 Cor 18/19

RECEIVED
LARAMIE COUNTY
CHEYENNE, WY.

'93 SEP 3 AM 10 29
126093

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

Original Survey: Alfred M. Rodgers, U.S. Deputy Surveyor, July 1871


Record: 34.14 Chains Set a Quartz 14 x 7 x 5 for 1/4 Sec Cor

Found: 8-12-1993 Recovered a well set stone in a east-west fenceline. Stone was marked 1/4 on the North face.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set: Steel fence post witness adjacent and approx. 1' west of stone. Stone was between two brace posts approx. 7' apart.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY. (May Sketch or Paste Reproduction on Reverse Side.)

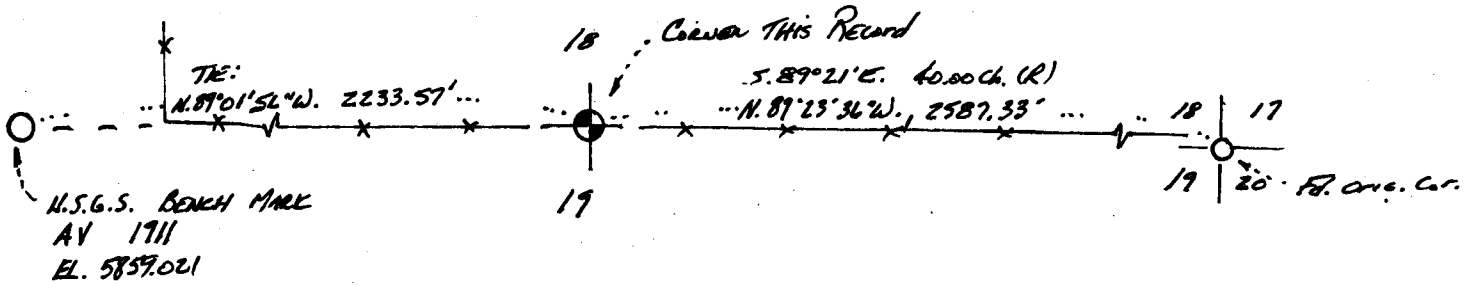


* * SKETCH ONLY
NOT TO SCALE

Basis of Bearings: Solar Observation at the NW Corner of Section 20, T.16N.,R.64W., 6th P.M.

I, Paul A. Reid certify that I have carefully examined the work done on the diagrammed corner as reported on this recordation form and approve

Signature of Surveyor

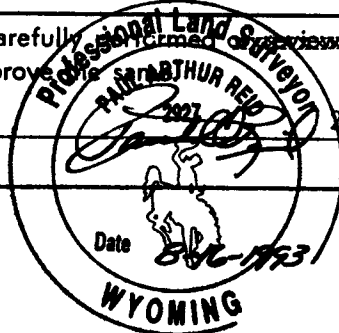

Registration No. 2927

STATE OF WYOMING,
Office of Clerk and Recorder,
County of _____

This "corner record" was filed for record on the _____ day of _____, 19____, was noted on the cross-index plat and is assigned page No. _____, in book No. _____.

Cross Index No.	County Official		
	N3	T. 16N.	R. 64W. 6th P.M.
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____

1/4 cor. 18/19