

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)


LOCATION
 S.23 S.24
 S.26 S.25
 T.16N., R.64W.
 6th P.M.

From the corner position:
 A "WCCR" stone bears S 45°13' W, 56.40' distant.
 A "WCCR" stone bears N 45°08' W, 56.40' distant.
 "WCCR" stones set by Laramie County Surveyor.
 G.L.O. record: Quartz boulder, 16 x 7 x 6, Alfred M. Rogers, 1871.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner: No monument set.
 Accessories: None set.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
 (May Sketch or Paste Reproduction on Reverse Side.)

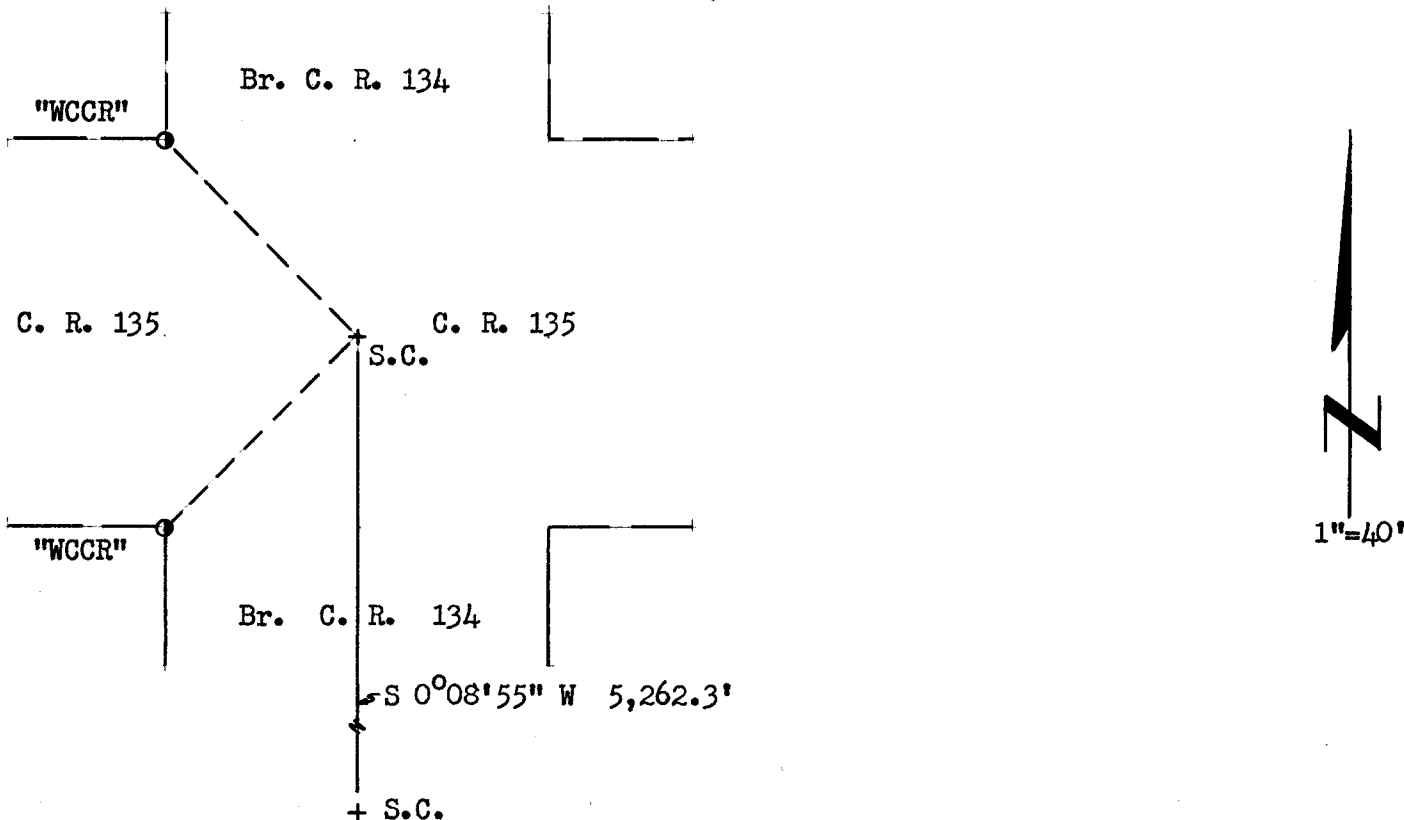

Note: Fence Lines not shown.

I, R.L. Hudson certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson Wyoming L.S. No. 519
 Signature of Surveyor Registration No.

STATE OF WYOMING,
 Office of Clerk and Recorder,
 County of Laramie

This "corner record" was filed for record on the 9th day of August, 19 72, was noted on the cross-index plat and is assigned page No. 16-64, in book No. 615

John B. Hillman
 County Official

Cross Index No. _____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____

The State of Wyoming } SS
County of Laramie

This instrument was filed for record
at 9:10 o'clock P. M. on the
24th day of August
A. D. 1922 and duly recorded in
Book _____ on page _____

John B. Williams

County Clerk & Ex-Officio Register of Deeds
By _____ Deputy