

State of Wyoming Corner Record

(In compliance with the **CORNER PERPETUATION AND FILING ACT**, Wyoming Statutes, 1997 Section 33-29-140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.


G.L.O. RECORD:
NORTH BETWEEN SECTIONS 2 AND 3
VA. 15°20'E. SET A GRANITE BOULDER
AT 40.0 CHAINS 15"X8"X5" FOR 1/4
SECTION CORNER

AT THE CORNER:
FOUND NOTHING.
PLACED A 2 1/2" ALUMINUM CAP SET
ON A 5/8" X 24" REBAR FLUSH WITH
THE GROUND STAMPED AS SHOWN.
CORNER WAS SET BY SINGLE
PROPORTION METHOD USING THE
SOUTHWEST CORNER OF SECTION 2
AND THE NORTHWEST CLOSING CORNER
OF SECTION 2.

Date of Field Work: 9/15/06

Office Reference: XXX

Cross Index Plat

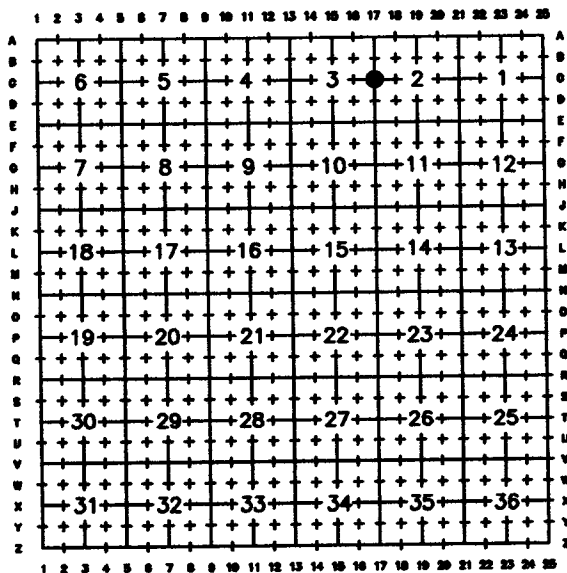

Firm/Agency, Address

Western R&D, Ltd.
 5809 Yellowstone Rd., Suite B
 Cheyenne, Wyoming 82009


This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

Telephone Number: (307) 632-5656



Denotes Monument Set



Corner Name West 1/4 Corner Section 2, T 16 N, R 67 W, 6th P.M.
 County: Laramie Wyoming

Cross-Index No.: C-17

SBRPEPLS/PLSW: March 1994; PLSW January 1998