


# State of Wyoming Corner Record

(In compliance with the **CORNER PERPETUATION AND FILING ACT**, Wyoming Statutes, 1997 Section 33-29-140 et. seq. and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)


Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

**G.L.O. RECORD:**  
 EAST ON A RANDOM LINE BETWEEN SECTIONS 2 AND 11 VA. 15°17'E 80.60 CHAINS AND INTERSECTED NORTH-SOUTH LINE 10 LINKS SOUTH OF THE CORNER TO SECTIONS 1,2,11 AND 12 FROM WHICH CORNER RAN S89°56'W ON A TRUE LINE 40.30 CHAINS AND SET A GRANITE BOULDER 13"X9"X5" FOR 1/4 SECTION CORNER.



**NOTE:**  
ALL FENCES ARE BARBED WIRE.

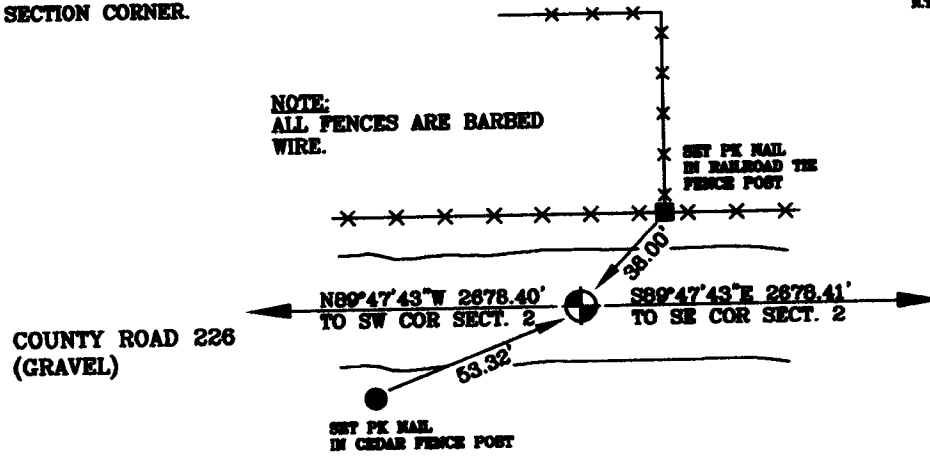


**AT THE CORNER:**  
 FOUND NOTHING.  
 PLACED A 2 1/2" ALUMINUM CAP SET ON A 5/8" X 24" REBAR FLUSH WITH THE GROUND STAMPED AS SHOWN.  
 CORNER WAS SET BY SINGLE PROPORTION METHOD USING THE SOUTHEAST AND THE SOUTHWEST CORNERS OF SECTION 2.

Date of Field Work: 9/15/06

Office Reference: XXX

### Cross Index Plat

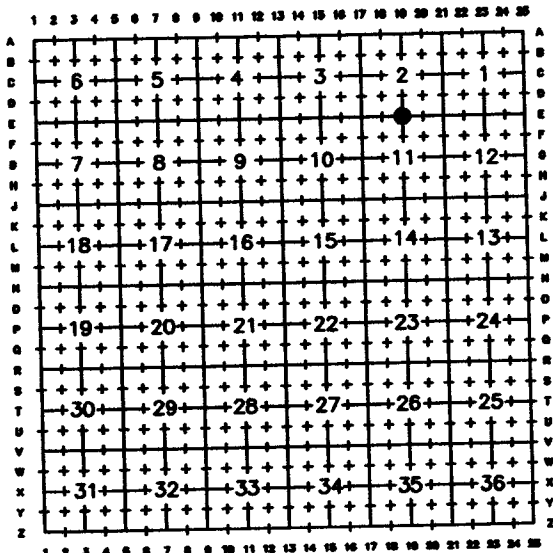

Firm/Agency, Address

Western R&D, Ltd.  
 5809 Yellowstone Rd., Suite B  
 Cheyenne, Wyoming 82009



This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

Telephone Number: (307) 632-5656



Denotes Monument Set

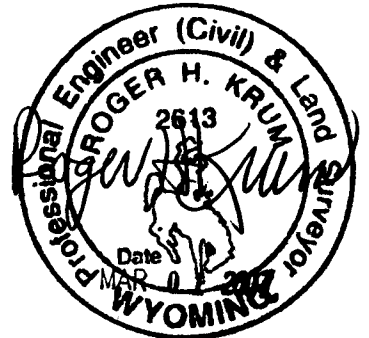

Corner Name South 1/4 Corner Section 2, T 16 N, R 67 W, 6th P.M.  
 County: Laramie Wyoming

Cross-Index No.: E-19

SBRPEPLS/PLSW: March 1994; PLSW January 1998