State of Wyoming Corner Record

(in compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997 Section 33-29-140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

RECORD:

SET A GRANITE BOULDER 12 X 10 X 5 FOR CORNER TO SECTIONS

MONUMENT FOUND:


FOUND A 12" X 5" GRANITE STONE PROJECTING 9" ABOVE GROUND SURFACE WITH 5 NOTCHES ON SOUTH FACE AND 2 ON EAST FACE.

MONUMENT SET:

NOTHING SET.

REFERENCES:

STONE LIES IN A N-S FENCE LINE, 4' NORTH AND 4' EAST OF A OVERHEAD ELECTRIC LINE RUNNING S & E. SET MAG NAILS FOR REFERENCE.

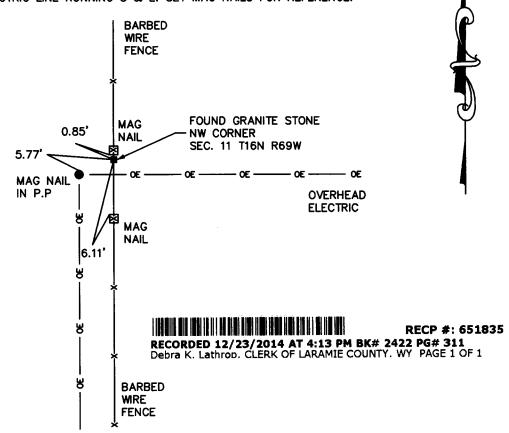

Date of Field Work: 8/31/10

Office Reference: 08300

Monument Inscripition

Cross Index Plat


Firm/Agency, Address

STEIL SURVEYING SERVICES LLC 1102 WEST 19th STREET <u>82001</u>

Telephone Number: (307) 634-7273

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



Corner Name NW CORNER Section 11, T 16 N, R 69 W, 6th P.M.

County: LARAMIE Wyoming

SBRPEPLS/PLSW: March 1994; PLSW January 1998

Cross-Index No.: <u>E-17</u>