

State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors.)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: Henry G. Hay, U.S. Deputy Surveyor, Nov. 6-12, 1873. To a point in the Eastern Boundary of Wyoming 28 links North of the 29th Mile post, where I set a Limestone 20 x 11 x 4 = 15 inches deep marked with 2 notches on the South side 4 notches on the North side and C.C. on the West side

Edward F. Stahle, U.S. Deputy Surveyor, May 26, 1908. 0.26 chains To a point 04 lks. W. of the closing cor. of secs. 23 and 26, T.17N. R.60W., Wyoming a lime stone 18 x 3 x 10 ins. above ground, with trace of pits. On the true line I set an iron post 3 ft. long, 2 3/4 ins. diam., 26 ins. in the ground surmounted by brass cap, ...

Found: 1 1/2" aluminum cap marked L.S. 3891. After measuring to adjacent corners and monuments north and south this monument was accepted as the closing corner to Sections 23 and 26 on the Wyoming State Line. Also had discussions on the telephone with Mr. Robert Taylor, Wyoming P.L.S. 3891 who stated he could not locate in his records of how the corner was re-established.

LARAMIE COUNTY CLERK
CHEYENNE, WY.
'95 JUN 15 AM 10 16
163689


SEE ALSO RECORD OF SURVEY TO BE FILED IN LARAMIE COUNTY CLERKS OFFICE.

BOOK 1400

0479

Date of Field Work: April-Dec. 1994 Office Reference: A.V.I. Project No. 2-1847.94

CROSS INDEX DIAGRAM

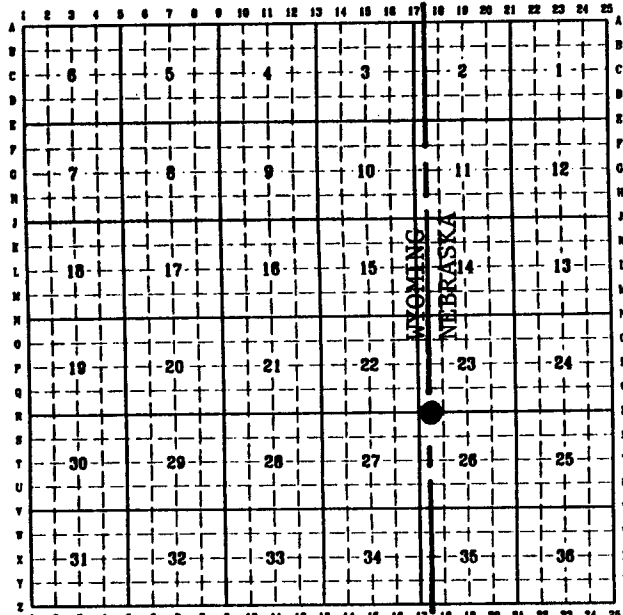

Firm/Agency, Address


PREPARED BY:

Paul A. Reid, P.L.S.
A.V.I., P.C.
2035 Westland Road
Cheyenne, WY 82001

(307) 637-6017

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

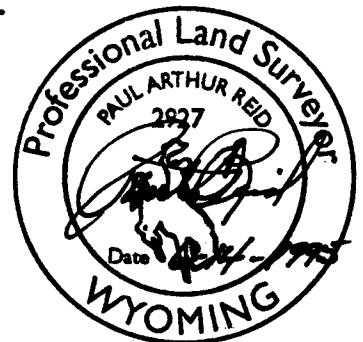

Corner Name: Closing Corner S23/S26 Section: 23/26 17N R. 60W; 6th P.M. Cross-Index No.: R-17-5