

State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors.)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: Edward F. Stahle, U.S. Deputy Surveyor, May 26, 1908. 0.28 Chains To a point 03 lks. W. of the closing corv of secs. 26 and 35, T.17N. R.60W., Wyoming, a lime stone 12 x 3 x 10 ins above ground. On the true line I set an iron post 3 ft. long, 2 3/4 ins. diam., 26 ins. in the ground, surmounted by brass cap, marked T. 17 N., R. 60 W., S. 26 on N. W.; Sec. 35 on S.W.; WYO on W. and NEB on E.; dig pits...

Found: 2 3/4" Iron Pipe with Brass Cap as noted above lying alongside M.P. No. 28 which was leaning easterly.

Set: At the proportionate distance between M.P. 28 and M.P. 29 I reset the found brass cap monument. Also set a 5' steel fence post south as witness.

LARAMIE COUNTY CLERK
CHEYENNE, WY.
'95 JUN 15 AM 10 16
163688


SEE ALSO RECORD OF SURVEY TO BE FILED IN LARAMIE COUNTY CLERKS OFFICE.

BOOK 1400

0478

Date of Field Work: March 1995 Office Reference: A.V.I. Project No. 2-1847.94

CROSS INDEX DIAGRAM

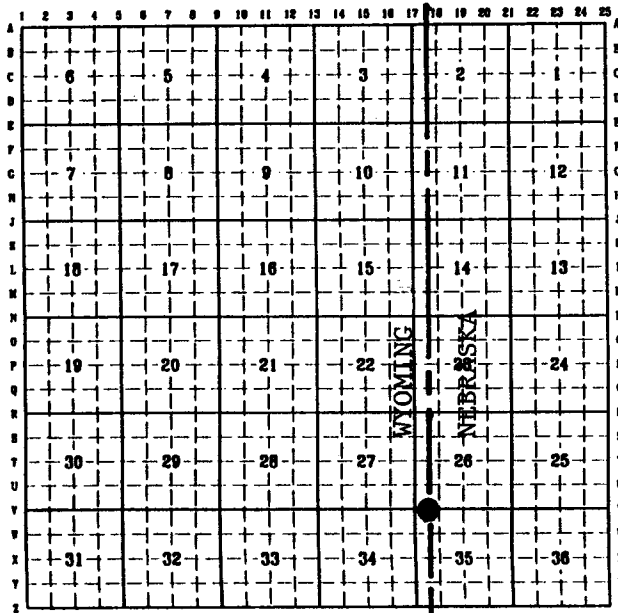

Firm/Agency, Address

PREPARED BY:

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

Paul A. Reid, P.L.S.
A.V.I., P.C.
2035 Westland Road
Cheyenne, WY 82001
(307) 637-6017

