054373

RECEIVED
LARAMIE COUNTY
CHEYENNE, WY.

'89 FEB 21 PM 1 09

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

S.11 S.12
S.14 S.13
T.17N., R.61W.
6th P.M.

Found 50d spike and replaced with monument.

G.L.O. Record: Limestone 20"x14"x3" set 12" deep marked with 4 notches on South side and 1 notch on East side. Set by Charles A. Caton, August 4, 1873.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner: Replaced found 50d spike with 5/8"x18" rebar with 2" Aluminum Cap stamped as shown below, 0.2' below road surface. 33' South of East-West powerline, 29' West of North-South powerline, on line with fence West.

Accessories : See ties below.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

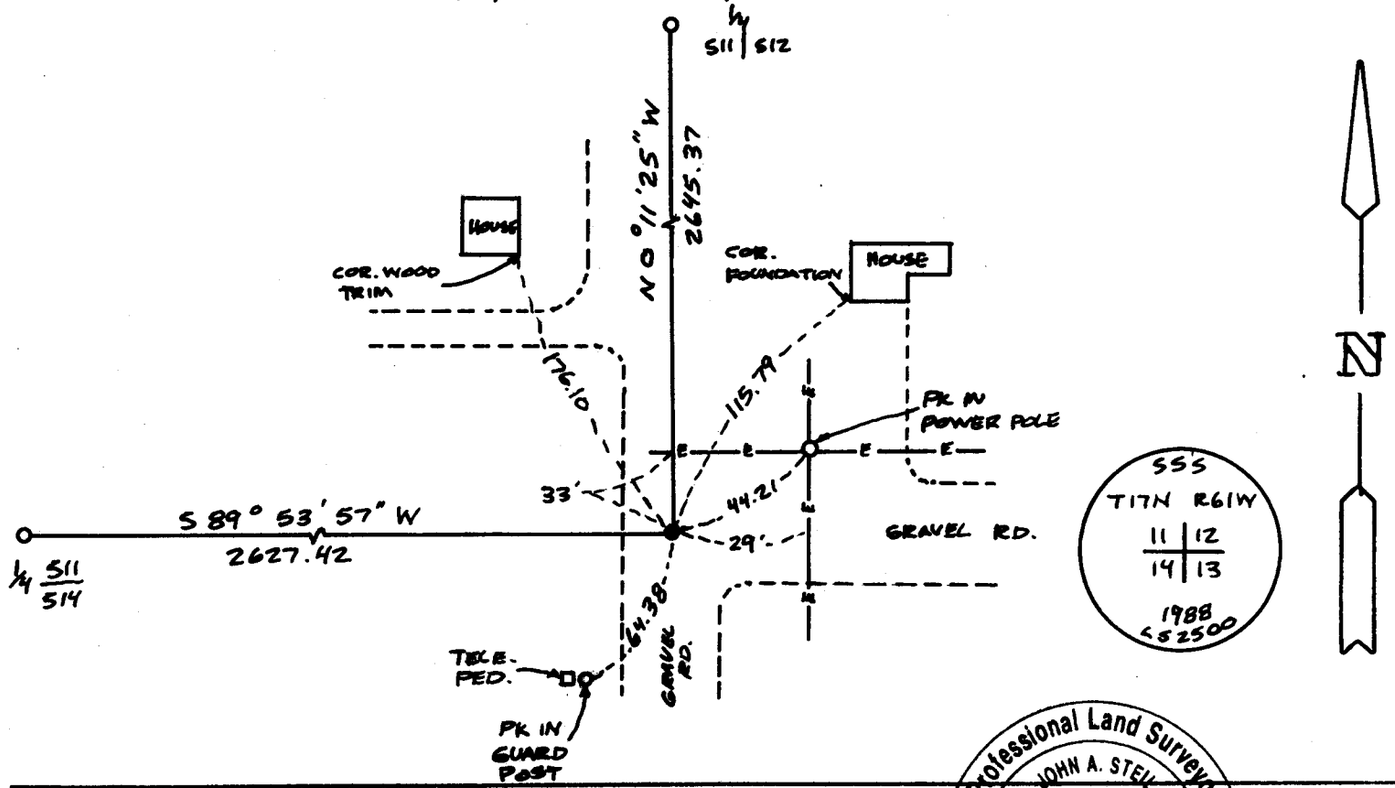

I, John A. Steil certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Professional Land Surveyor JOHN A. STEIL 2500 WYOMING

Signature of Surveyor — Date 2-16-89 — L.S. 2500 Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of_____

This "corner record" was filed for record on the_____day of _____, 19____, was noted on the cross-index plat and is assigned page No._____, in book No._____.

_____
County Official

Cross Index No. J-21 T. 17N R. 61W Mer. 6th
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.

BOOK 1270

930