State of Wyoming Corner Record

(In compliance with the <u>CORNER PERPETUATION AND FILING ACT.</u> Wyoming Statutes, 2013 Section 33—29—901 through 33—29—910, and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

METHOD FOR REESTABLISHMENT OF LOST CORNER:

Used physical evidence and possession lines available to establish position.

ORIGINAL GLO RECORD:

Sandstone 16"x12"x4" marked 5 notches on S side and 3 notches on E side

MONUMENT FOUND:


No monument or evidence found

MONUMENT SET:

2 1/2" Aluminum Cap on a #6 Rebar, three (3) inches above ground, stacked stones around monument.

All dimensions are in US Survey Feet

Monument location

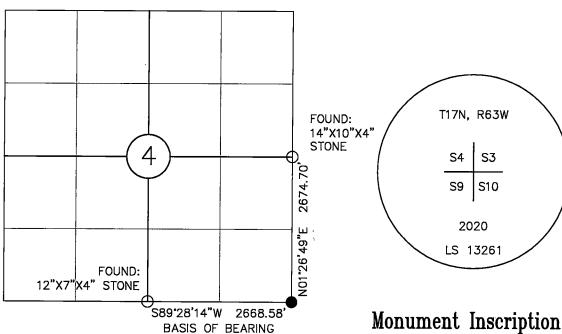


Date of Field Work: 11/16/2020

Office Reference: 1903-009

Monument Inscription

See Reverse Side for References


Cross Index Plat



Firm/Agency, Address DALEY LAND SURVEYING, INC. 17011 LINCOLN AVE., #361 PARKER, CO 80134 (303) 953-9841

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



RECP #: 801036

RECORDED 2/1/2021 AT 1:02 PM BK# 2717 PG# 2319 Debra K. Lee, CLERK OF LARAMIE COUNTY, WY PAGE 1 OF 1

Corner Name Southeast Corner Section 4, T 17 N, R 63 W, 6th P.M.

Cross-Index No.: E-13.

County: <u>LARAMIE</u>

WBPEPLS/PLSW: March 1994; PLSW January 1998, January 2019