

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)


Record: Set a limestone 18X12X4 for ¼ section corner.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Found: loosely set limestone 18"x12"x4", 15" above ground marked with a faint ¼ notched on West face. Reset stone in found position 6" above ground.

Set: a green metal post 5.0' West.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

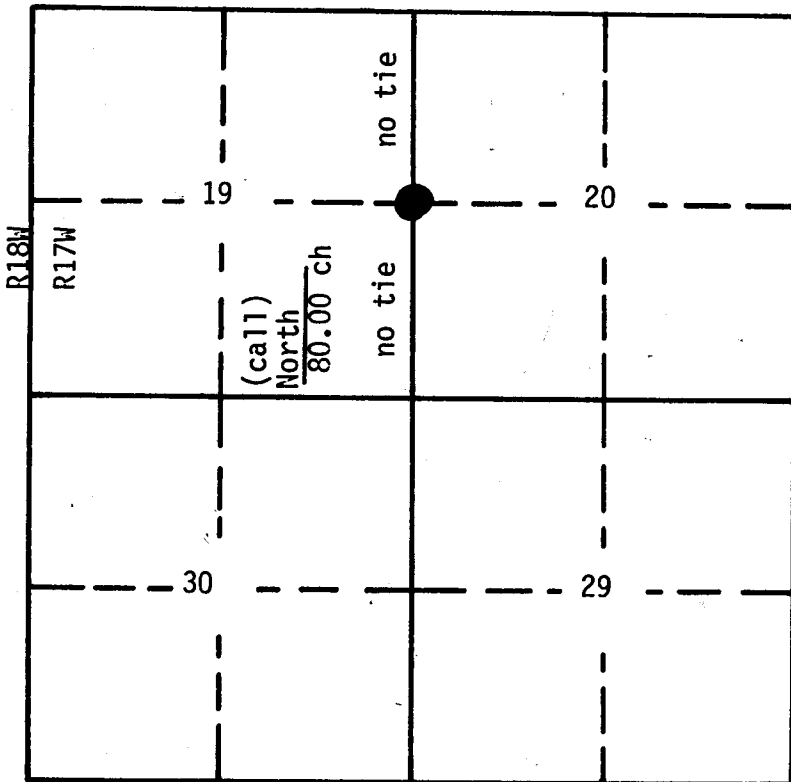

Section 20 T: 17N R: 66W

- corner filed--this form
- controlling corner

DETAILS

This corner was located on October 26, 1983. The adjoining corners North and South were searched for but not recovered.

Job # 83106.000

I, Randall J. Rowley certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Randall J. Rowley
Signature of Surveyor

3888
Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of Laramie

725440

This "corner record" was filed for record on the DEC 9 day of 1983, 1983, was noted on the cross-index plat and is assigned page No. _____, in book No. _____.

Janet C. Whitehead
County Official

Cross Index No. _____ T. _____ R. _____ Mer.
 _____ T. _____ R. _____ Mer.
 _____ T. _____ R. _____ Mer.
 _____ T. _____ R. _____ Mer.
 _____ T. _____ R. _____ Mer.
 _____ T. _____ R. _____ Mer.
 _____ T. _____ R. _____ Mer.