054315

RECEIVED
LARAMIE COUNTY
CHEYENNE, WY.

'89 FEB 17 AM 10 26

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

¼
S.29 S.28
T.17N., R.67W.
6th P.M.

Found no evidence of previous monumentation.

G.L.O. Record: Granite stone 18"x8"x4" set by Alfred M. Rogers, October 19, 1872.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner: Set at proportionate distance 3"x30" Aluminum Pipe with 3½" Aluminum Cap stamped as shown below projecting 0.5' above ground and encircled by a collar of stone on top NE slope of swale.

Accessories : See ties below.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

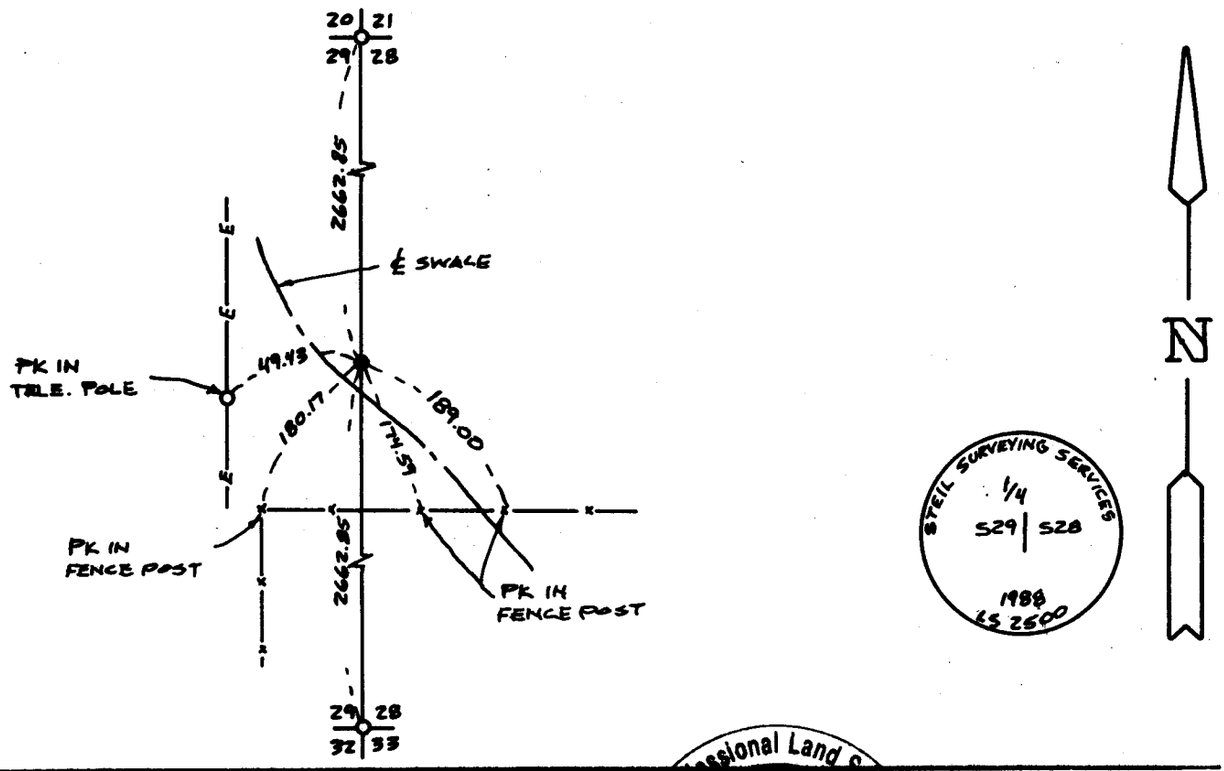

I, John A. Steil certify that I have personally performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Professional Land Surveyor
John A. Steil
2500
WYOMING

Signature of Surveyor — Registration No. L.S. 2500

Date 2-16-89

STATE OF WYOMING,
Office of Clerk and Recorder,
County of _____

This "corner record" was filed for record on the _____ day of _____, 19____, was noted on the cross-index plat and is assigned page No. _____, in book No. _____.

Janet C. Whitehead
County Official

Cross Index No. T-9 T. 17N R. 67W Mer. 6th
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.

BOOK 1270

811